

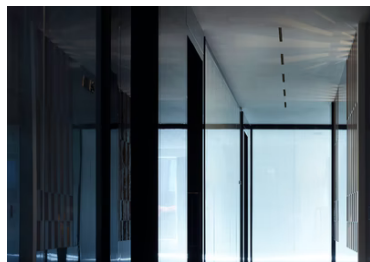


## Light Shadow Fixed No Trim 4 Spots Optic Flood

■ 03.9225.14A - Black/White

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V).

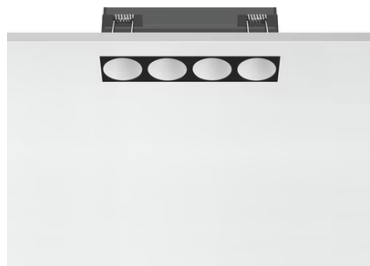


### Main specifications

Number of heads	1	Net lumen (lm)	741
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	10.8W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	33
Beam angle C90-270 (°)	33

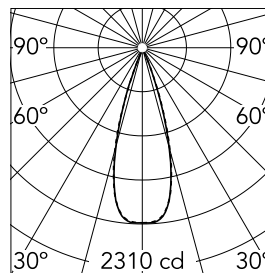

Beam Angle: 33°

h(m)	E(lx)	D(m)
1	2310	0.59
2	577	1.18
3	257	1.78
4	144	2.37
5	92	2.96

Luminous flux luminaire  
741 lm (EXTREME CUT OFF)

### Electrical

Frequency (Hz)	50/60	Insulation class	II
Voltage (V)	220.00		
Dimmable	No		
Driver	Remote included		
Emergency	Without		

### Physical


Color	Black/White
Orientation	Fixed
Recessed depth (mm)	75
Weight (kg)	0.34
Length (mm)	140

### Note

It requires a pre-installation frame, to be ordered separately.



# Light Shadow Fixed No Trim 4 Spots Optic Flood



---

Pre-installation Frame  
08.0511.00

---

Accessory for mounting of No Trim  
continuous line.  
08.0052.90