



## Light Shadow Fixed No Trim 4 Spots Optic Wide Flood

03.8361.40A - White/Gold

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V).

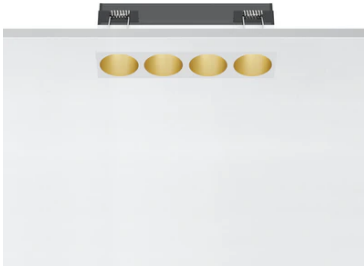


### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	716
<b>Lamp category</b>	LED	<b>Mountings</b>	Ceiling recessed
<b>Power (W)</b>	10.8W	<b>Environment</b>	Indoor
<b>CCT (K)</b>	2700K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	Power LED
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Wide flood
<b>Beam angle (°)</b>	46
<b>Beam angle C90-270 (°)</b>	46

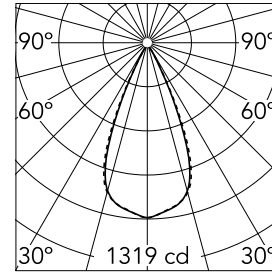

<b>Beam Angle:</b>	46°		
<b>h(m)</b>	<b>E(lx)</b>	<b>D(m)</b>	
1	1319	0.84	
2	330	1.69	
3	147	2.53	
4	82	3.38	
5	53	4.22	

Luminous flux luminaire  
716 lm (EXTREME CUT OFF)


### Electrical

<b>Frequency (Hz)</b>	50/60	<b>Emergency</b>	Without
<b>Voltage (V)</b>	220.00	<b>Insulation class</b>	II
<b>Dimmable</b>	No		
<b>Driver</b>	Remote		
<b>Driver type</b>	Electronic		

### Physical

<b>Color</b>	White/Gold
<b>Orientation</b>	Fixed
<b>Recessed depth (mm)</b>	75
<b>Weight (kg)</b>	0.34
<b>Length (mm)</b>	140


### Certification / Marking



### Note

It requires a pre-installation frame, to be ordered separately.

## Light Shadow Fixed No Trim 4 Spots Optic Wide Flood



---

Pre-installation Frame  
08.0511.00

---

Accessory for mounting of No Trim  
continuous line.  
08.0052.90