



## Light Shadow Fixed No Trim 8 Spots Optic Flood

03.9258.14A - Black/Gold

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included (220-240V).

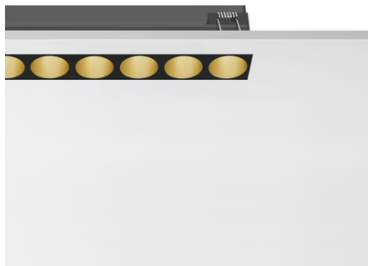


### Main specifications

Number of heads	1	Net lumen (lm)	1850
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	21.6W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	33
Beam angle C90-270 (°)	33

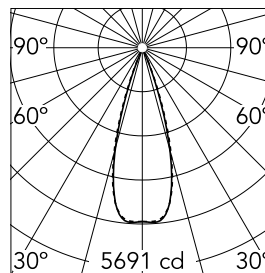

Beam Angle: 33°

h(m)	E(lx)	D(m)
1	5691	0.60
2	1423	1.20
3	632	1.79
4	356	2.39
5	228	2.99

Luminous flux luminaire  
1850 lm (EXTREME CUT OFF)

### Electrical

Frequency (Hz)	50/60	Insulation class	II
Voltage (V)	220.00		
Dimmable	No		
Driver	Remote included		
Emergency	Without		

### Physical



Color	Black/Gold
Orientation	Fixed
Recessed depth (mm)	75
Weight (kg)	0.50
Length (mm)	280

### Note

It requires a pre-installation frame, to be ordered separately.



# Light Shadow Fixed No Trim 8 Spots Optic Flood



---

Accessory for mounting of No Trim  
continuous line.  
08.0052.90

---

Pre-installation Frame  
08.0512.00