



Light Shadow Fixed No Trim 8 Spots Optic Wide Flood

■ 03.8371.40A - White/Black

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included (220-240V).

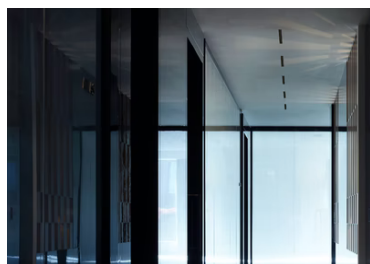


Main specifications

| | | | |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 1858 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 21.6W | Environment | Indoor dry location |
| CCT (K) | 3000K | | |
| CRI | 90 | | |

Optical

| | |
|------------------------|------------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Wide flood |
| Beam angle (°) | 46 |
| Beam angle C90-270 (°) | 46 |

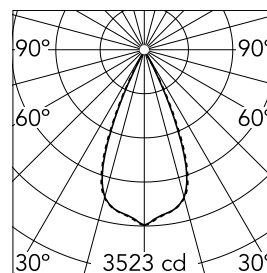

Beam Angle: 46°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 3523 | 0.84 |
| 2 | 881 | 1.69 |
| 3 | 391 | 2.53 |
| 4 | 220 | 3.38 |
| 5 | 141 | 4.22 |

Luminous flux luminaire
1858 lm (EXTREME CUT OFF)

Electrical

| | | | |
|----------------|-----------------|------------------|----|
| Frequency (Hz) | 50/60 | Insulation class | II |
| Voltage (V) | 220.00 | | |
| Dimmable | No | | |
| Driver | Remote included | | |
| Emergency | Without | | |

Physical


| | |
|---------------------|-------------|
| Color | White/Black |
| Orientation | Fixed |
| Recessed depth (mm) | 75 |
| Weight (kg) | 0.50 |
| Length (mm) | 280 |

Note


It requires a pre-installation frame, to be ordered separately.



Light Shadow Fixed No Trim 8 Spots Optic Wide Flood



Accessory for mounting of No Trim
continuous line.
08.0052.90



Pre-installation Frame
08.0512.00