



## Light Shadow Fixed No Trim Dali Version 12 Spots Optic Flood

■ ■ 03.9266.14ADA - Black/Black

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

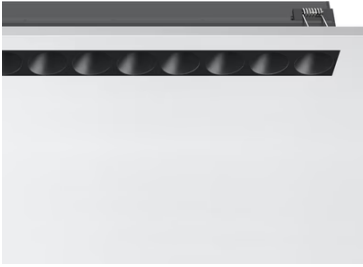


### Main specifications

|                 |       |                |                     |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1     | Net lumen (lm) | 2610                |
| Lamp category   | LED   | Mountings      | Ceiling recessed    |
| Power (W)       | 32.4W | Environment    | Indoor dry location |
| CCT (K)         | 2700K |                |                     |
| CRI             | 90    |                |                     |

### Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | Power LED |
| Light distribution     | Symmetric |
| Optical type           | Flood     |
| Beam angle (°)         | 33        |
| Beam angle C90-270 (°) | 33        |

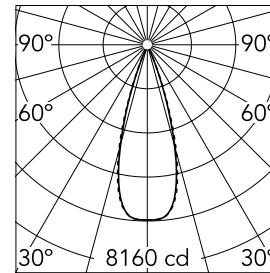

Beam Angle: 33°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 8160  | 0.60 |
| 2    | 2040  | 1.19 |
| 3    | 907   | 1.79 |
| 4    | 510   | 2.39 |
| 5    | 326   | 2.99 |

Luminous flux luminaire  
2610 lm (EXTREME CUT OFF)

### Electrical

|                |                 |                  |         |
|----------------|-----------------|------------------|---------|
| Frequency (Hz) | 50/60           | Emergency        | Without |
| Voltage (V)    | 220.00          | Insulation class | II      |
| Dimmable       | Yes             |                  |         |
| Driver         | Remote included |                  |         |
| Driver type    | Dimmable DALI   |                  |         |
|                | 1               |                  |         |

### Physical


|                     |             |
|---------------------|-------------|
| Color               | Black/Black |
| Orientation         | Fixed       |
| Recessed depth (mm) | 75          |
| Weight (kg)         | 0.66        |
| Length (mm)         | 420         |

### Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Fixed No Trim Dali Version 12 Spots Optic Flood

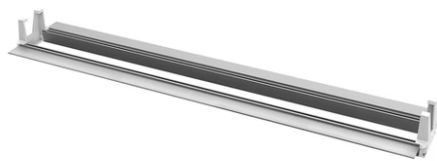

Pre-installation Frame  
08.0513.00

Accessory for mounting of No Trim  
continuous line.  
08.0052.90