



## Light Shadow Fixed No Trim Dali Version 12 Spots Optic Flood

■ 03.9266.40ADA - White/Black

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

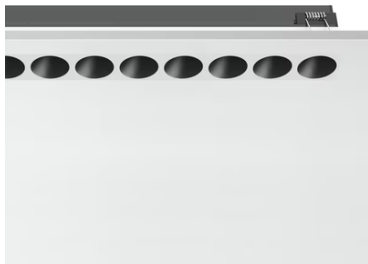


### Main specifications

Number of heads	1	Net lumen (lm)	2610
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	32.4W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	33
Beam angle C90-270 (°)	33

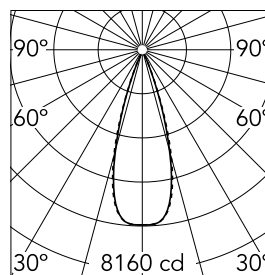

Beam Angle: 33°

	h(m)	E(lx)	D(m)
1	8160	0.60	
2	2040	1.19	
3	907	1.79	
4	510	2.39	
5	326	2.99	

Luminous flux luminaire  
2610 lm (EXTREME CUT OFF)

### Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI		
	1		

### Physical


Color	White/Black
Orientation	Fixed
Recessed depth (mm)	75
Weight (kg)	0.66
Length (mm)	420

### Note

It requires a pre-installation frame, to be ordered separately.



# Light Shadow Fixed No Trim Dali Version 12 Spots Optic Flood

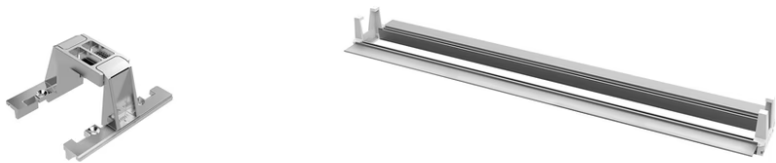

---

Accessory for mounting of No Trim  
continuous line.  
08.0052.90

---

Pre-installation Frame  
08.0513.00