



## Light Shadow Fixed No Trim Dali Version 12 Spots Optic Spot

03.8883.40ADA - White/Gold

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

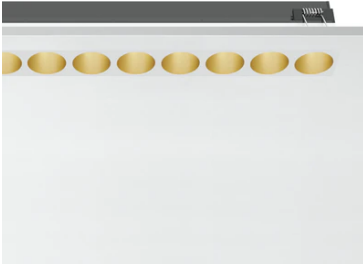


### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	2817
<b>Lamp category</b>	LED	<b>Mountings</b>	Ceiling recessed
<b>Power (W)</b>	32.4W	<b>Environment</b>	Indoor
<b>CCT (K)</b>	3000K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	Power LED
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Spot
<b>Beam angle (°)</b>	10
<b>Beam angle C90-270 (°)</b>	10

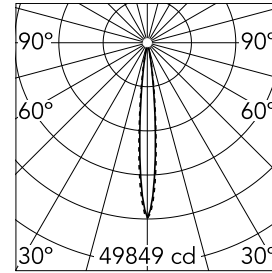

<b>Beam Angle:</b>	10°		
<b>h(m)</b>	<b>E(lx)</b>	<b>D(m)</b>	
1	49849	0.18	
2	12462	0.36	
3	5539	0.55	
4	3116	0.73	
5	1994	0.91	

Luminous flux luminaire  
2817 lm (EXTREME CUT OFF)

### Electrical

<b>Frequency (Hz)</b>	50/60	<b>Emergency</b>	Without
<b>Voltage (V)</b>	220.00	<b>Insulation class</b>	II
<b>Dimmable</b>	Yes		
<b>Driver</b>	Remote		
<b>Driver type</b>	Electronic dimmable push, Electronic dimmable DALI		

### Physical

<b>Color</b>	White/Gold
<b>Orientation</b>	Fixed
<b>Recessed depth (mm)</b>	75
<b>Weight (kg)</b>	0.66
<b>Length (mm)</b>	420

### Note

It requires a pre-installation frame, to be ordered separately.



## Light Shadow Fixed No Trim Dali Version 12 Spots Optic Spot



---

Accessory for mounting of No Trim  
continuous line.  
08.0052.90



---

Pre-installation Frame  
08.0513.00