



## Light Shadow Fixed No Trim Dali Version 12 Spots Optic Wide Flood

■ ■ 03.8375.14ADA - Black/Black

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

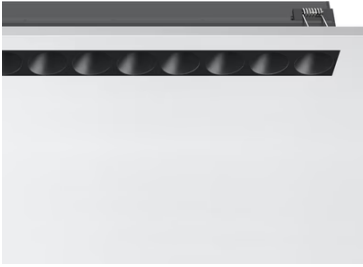


### Main specifications

Number of heads	1	Net lumen (lm)	2666
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	32.4W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	46
Beam angle C90-270 (°)	46

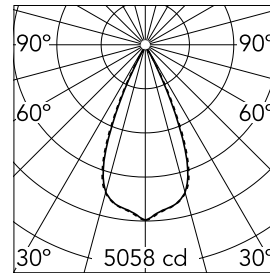

Beam Angle: 46°

h(m)	E(lx)	D(m)
1	5058	0.84
2	1264	1.69
3	562	2.53
4	316	3.38
5	202	4.22

Luminous flux luminaire  
2666 lm (EXTREME CUT OFF)

### Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI		
	1		

### Physical


Color	Black/Black
Orientation	Fixed
Recessed depth (mm)	75
Weight (kg)	0.66
Length (mm)	420

### Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Fixed No Trim Dali Version 12 Spots Optic Wide Flood

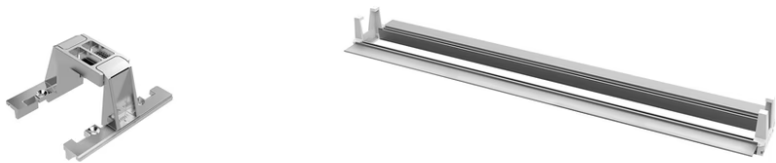

---

Accessory for mounting of No Trim  
continuous line.  
08.0052.90

---

Pre-installation Frame  
08.0513.00