


## Light Shadow Fixed No Trim Dali Version 12 Spots Optic Wide Flood

03.8377.14ADA - Black/Gold

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

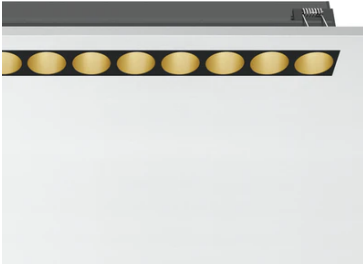


### Main specifications

|                        |       |                       |                     |
|------------------------|-------|-----------------------|---------------------|
| <b>Number of heads</b> | 1     | <b>Net lumen (lm)</b> | 2597                |
| <b>Lamp category</b>   | LED   | <b>Mountings</b>      | Ceiling recessed    |
| <b>Power (W)</b>       | 32.4W | <b>Environment</b>    | Indoor dry location |
| <b>CCT (K)</b>         | 2700K |                       |                     |
| <b>CRI</b>             | 90    |                       |                     |

### Optical


|                               |            |
|-------------------------------|------------|
| <b>Lighting type</b>          | Direct     |
| <b>LED type</b>               | Power LED  |
| <b>Light distribution</b>     | Symmetric  |
| <b>Optical type</b>           | Wide flood |
| <b>Beam angle (°)</b>         | 46         |
| <b>Beam angle C90-270 (°)</b> | 46         |

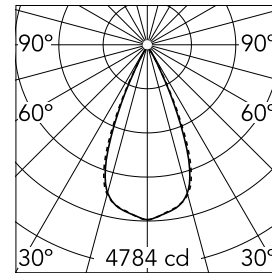

Beam Angle: 46°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 4784  | 0.84 |
| 2    | 1196  | 1.69 |
| 3    | 532   | 2.53 |
| 4    | 299   | 3.38 |
| 5    | 191   | 4.22 |

Luminous flux luminaire  
2597 lm (EXTREME CUT OFF)



### Electrical


|                       |                 |                         |         |
|-----------------------|-----------------|-------------------------|---------|
| <b>Frequency (Hz)</b> | 50/60           | <b>Emergency</b>        | Without |
| <b>Voltage (V)</b>    | 220.00          | <b>Insulation class</b> | II      |
| <b>Dimmable</b>       | Yes             |                         |         |
| <b>Driver</b>         | Remote included |                         |         |
| <b>Driver type</b>    | Dimmable DALI   |                         |         |
|                       | 1               |                         |         |

### Physical


|                            |            |
|----------------------------|------------|
| <b>Color</b>               | Black/Gold |
| <b>Orientation</b>         | Fixed      |
| <b>Recessed depth (mm)</b> | 75         |
| <b>Weight (kg)</b>         | 0.66       |
| <b>Length (mm)</b>         | 420        |

### Note

It requires a pre-installation frame, to be ordered separately.



## Light Shadow Fixed No Trim Dali Version 12 Spots Optic Wide Flood



---

Accessory for mounting of No Trim  
continuous line.  
08.0052.90

---

Pre-installation Frame  
08.0513.00