




## Light Shadow Fixed No Trim Dali Version 2 Spots Optic Spot

03.8859.14ADA - Black/Gold

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

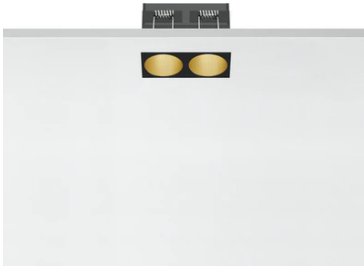


### Main specifications

Number of heads	1	Net lumen (lm)	465
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	5.4W	Environment	Indoor
CCT (K)	3000K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	10
Beam angle C90-270 (°)	10

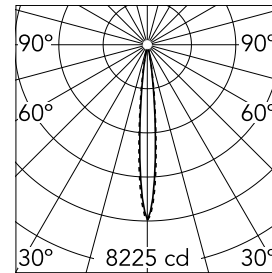

Beam Angle:	10°		
	h(m)	E(lx)	D(m)
1	8225	0.18	
2	2056	0.36	
3	914	0.55	
4	514	0.73	
5	329	0.91	

Luminous flux luminaire  
465 lm (EXTREME CUT OFF)

### Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic dimmable DALI		


### Physical

Color	Black/Gold
Orientation	Fixed
Recessed depth (mm)	150
Weight (kg)	0.25
Length (mm)	70

### Note

It requires a pre-installation frame, to be ordered separately.

## Light Shadow Fixed No Trim Dali Version 2 Spots Optic Spot



---

Accessory for mounting of No Trim  
continuous line.  
08.0052.90

---

Pre-installation Frame  
08.0510.00