


Light Shadow Fixed Trim 12 Spots Optic Flood

03.9178.40A - White/Gold

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

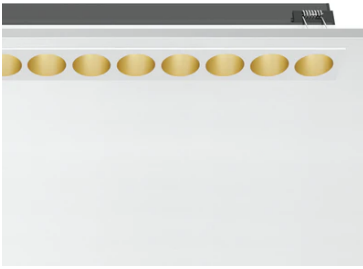


Main specifications

| | | | |
|------------------------|-------|-----------------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 2655 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 32.4W | Environment | Indoor dry location |
| CCT (K) | 3000K | | |
| CRI | 90 | | |


Optical

| | |
|-------------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Flood |
| Beam angle (°) | 33 |
| Beam angle C90-270 (°) | 33 |

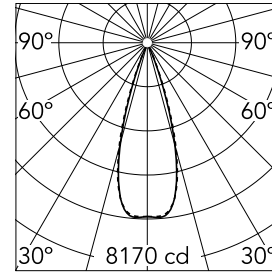

| | | |
|--------------------|--------------|-------------|
| Beam Angle: | 33° | |
| h(m) | E(lx) | D(m) |
| 1 | 8170 | 0.60 |
| 2 | 2042 | 1.20 |
| 3 | 908 | 1.79 |
| 4 | 511 | 2.39 |
| 5 | 327 | 2.99 |

Luminous flux luminaire
2655 lm (EXTREME CUT OFF)



Electrical

| | | | |
|-----------------------|-----------------|-------------------------|----|
| Frequency (Hz) | 50/60 | Insulation class | II |
| Voltage (V) | 220.00 | | |
| Dimmable | No | | |
| Driver | Remote included | | |
| Emergency | Without | | |

Physical

| | | | |
|----------------------------|------------|--------------------|-----|
| Color | White/Gold | Length (mm) | 427 |
| Orientation | Fixed | | |
| Trim | yes | | |
| Recessed depth (mm) | 75 | | |
| Weight (kg) | 0.66 | | |

Note

Pre-installation frame not required.

