



## Light Shadow Fixed Trim 12 Spots Optic Wide Flood

■ 03.8328.14A - Black/White

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

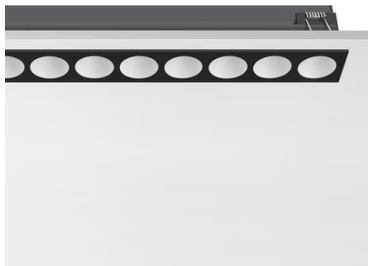


### Main specifications

Number of heads	1	Net lumen (lm)	2652
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	32.4W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	45
Beam angle C90-270 (°)	45

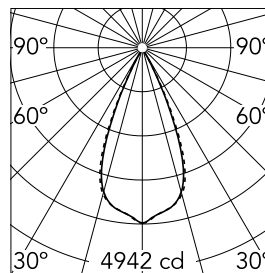

Beam Angle: 45°

	h(m)	E(lx)	D(m)
1	4942	0.83	
2	1235	1.67	
3	549	2.50	
4	309	3.34	
5	198	4.17	

Luminous flux luminaire  
2652 lm (EXTREME CUT OFF)

### Electrical

Frequency (Hz)	50/60	Insulation class	II
Voltage (V)	220.00		
Dimmable	No		
Driver	Remote included		
Emergency	Without		

### Physical

Color	Black/White	Length (mm)	427
Orientation	Fixed		
Trim	yes		
Recessed depth (mm)	75		
Weight (kg)	0.66		

### Note

Pre-installation frame not required.

