

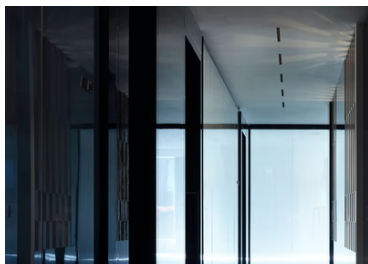


## Light Shadow Fixed Trim 2 Spots Optic Medium

03.9113.14A - Black/Gold

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

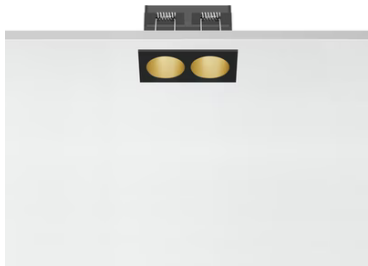


### Main specifications

|                 |       |                |                     |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1     | Net lumen (lm) | 466                 |
| Lamp category   | LED   | Mountings      | Ceiling recessed    |
| Power (W)       | 5.4W  | Environment    | Indoor dry location |
| CCT (K)         | 3000K |                |                     |
| CRI             | 90    |                |                     |

### Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | Power LED |
| Light distribution     | Symmetric |
| Optical type           | Medium    |
| Beam angle (°)         | 22        |
| Beam angle C90-270 (°) | 22        |



Beam Angle: 22°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 3118  | 0.39 |
| 2    | 779   | 0.78 |
| 3    | 346   | 1.17 |
| 4    | 195   | 1.56 |
| 5    | 125   | 1.95 |

Luminous flux luminaire  
466 lm (EXTREME CUT OFF)

### Electrical

|                |                 |                  |    |
|----------------|-----------------|------------------|----|
| Frequency (Hz) | 50/60           | Insulation class | II |
| Voltage (V)    | 220.00          |                  |    |
| Dimmable       | No              |                  |    |
| Driver         | Remote included |                  |    |
| Emergency      | Without         |                  |    |

### Physical

|                     |            |             |    |
|---------------------|------------|-------------|----|
| Color               | Black/Gold | Length (mm) | 77 |
| Orientation         | Fixed      |             |    |
| Trim                | yes        |             |    |
| Recessed depth (mm) | 150        |             |    |
| Weight (kg)         | 0.25       |             |    |

### Note

Pre-installation frame not required.

