



### Light Shadow Fixed Trim 4 Spots Optic Flood

03.9138.14A - Black/Gold

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V).

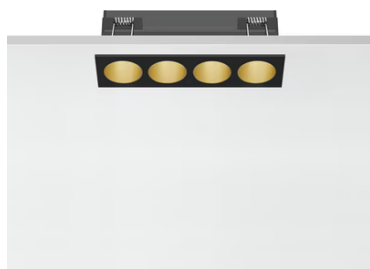


#### Main specifications

|                 |       |                |                     |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1     | Net lumen (lm) | 781                 |
| Lamp category   | LED   | Mountings      | Ceiling recessed    |
| Power (W)       | 10.8W | Environment    | Indoor dry location |
| CCT (K)         | 3000K |                |                     |
| CRI             | 90    |                |                     |

#### Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | Power LED |
| Light distribution     | Symmetric |
| Optical type           | Flood     |
| Beam angle (°)         | 33        |
| Beam angle C90-270 (°) | 33        |



Beam Angle: 33°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 2403  | 0.60 |
| 2    | 601   | 1.20 |
| 3    | 267   | 1.79 |
| 4    | 150   | 2.39 |
| 5    | 96    | 2.99 |

Luminous flux luminaire  
781 lm (EXTREME CUT OFF)

#### Electrical

|                |                 |                  |    |
|----------------|-----------------|------------------|----|
| Frequency (Hz) | 50/60           | Insulation class | II |
| Voltage (V)    | 220.00          |                  |    |
| Dimmable       | No              |                  |    |
| Driver         | Remote included |                  |    |
| Emergency      | Without         |                  |    |

#### Physical

|                     |            |             |     |
|---------------------|------------|-------------|-----|
| Color               | Black/Gold | Length (mm) | 147 |
| Orientation         | Fixed      |             |     |
| Trim                | yes        |             |     |
| Recessed depth (mm) | 75         |             |     |
| Weight (kg)         | 0.34       |             |     |

#### Note

Pre-installation frame not required.

