



## Light Shadow Fixed Trim Dali Version 2 Spots Optic Wide Flood

03.8307.14ADA - Black/Gold

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

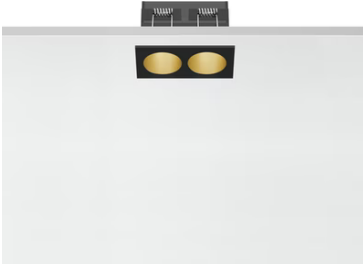


### Main specifications

Number of heads	1	Net lumen (lm)	452
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	5.4W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	46
Beam angle C90-270 (°)	46

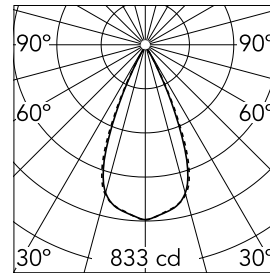

Beam Angle: 46°

h(m)	E(lx)	D(m)
1	833	0.84
2	208	1.69
3	93	2.53
4	52	3.38
5	33	4.22

Luminous flux luminaire  
452 lm (EXTREME CUT OFF)

### Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI		
	1		

### Physical

Color	Black/Gold	Length (mm)	77
Orientation	Fixed		
Trim	yes		
Recessed depth (mm)	150		
Weight (kg)	0.25		

### Note

Pre-installation frame not required.

