
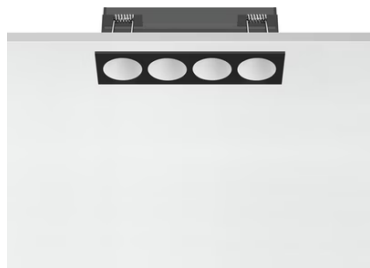


Light Shadow Fixed Trim Dali Version 4 Spots Optic Spot**03.8832.14ADA - Black/White**


Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V).

**Main specifications**

| | | | |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 801 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 10.8W | Environment | Indoor dry location |
| CCT (K) | 3000K | | |
| CRI | 90 | | |

Optical

| | |
|------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Spot |
| Beam angle (°) | 10 |
| Beam angle C90-270 (°) | 10 |

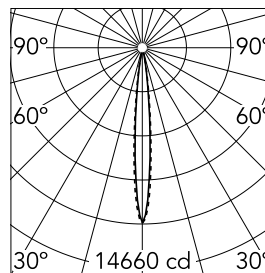

Beam Angle: 10°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 14660 | 0.17 |
| 2 | 3665 | 0.35 |
| 3 | 1629 | 0.52 |
| 4 | 916 | 0.70 |
| 5 | 586 | 0.87 |

Luminous flux luminaire
801 lm (EXTREME CUT OFF)**Electrical**

| | | | |
|----------------|-----------------|------------------|---------|
| Frequency (Hz) | 50/60 | Emergency | Without |
| Voltage (V) | 220.00 | Insulation class | II |
| Dimmable | Yes | | |
| Driver | Remote included | | |
| Driver type | Dimmable DALI | | |
| | 1 | | |

Physical

| | | | |
|---------------------|-------------|-------------|-----|
| Color | Black/White | Length (mm) | 147 |
| Orientation | Fixed | | |
| Trim | yes | | |
| Recessed depth (mm) | 75 | | |
| Weight (kg) | 0.34 | | |

Note

Pre-installation frame not required.