Light Shadow Fixed Trim Dali Version 4 Spots Optic Wide Flood

03.8311.40ADA - White/Gold

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V).

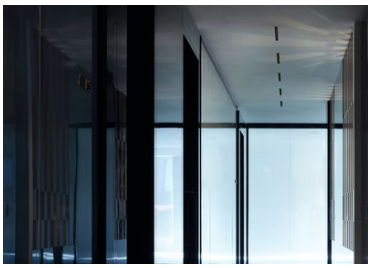



Main specifications

Number of heads	1	**Net lumen (lm)**	716
Lamp category	LED	**Mountings**	Ceiling recessed
Power (W)	10.8W	**Environment**	Indoor dry location
CCT (K)	2700K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	46
Beam angle C90-270 (°)	46



Luminous flux luminaire
716 lm (EXTREME CUT OFF)

Beam Angle: 46°

h(m)	E(lx)	D(m)
1	1319	0.84
2	330	1.69
3	147	2.53
4	82	3.38
5	53	4.22

Electrical

Frequency (Hz)	50/60	**Emergency**	Without
Voltage (V)	220.00	**Insulation class**	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI 1		

Physical

Color	White/Gold	**Length (mm)**	147
Orientation	Fixed		
Trim	yes		
Recessed depth (mm)	75		
Weight (kg)	0.34		

Note

Pre-installation frame not required.