


Light Shadow Optic Medium Casambi integrated

New

03.9630.14ACB - Black/White

LED lighting module, with 4 spotlights and low glare, to be installed in the The Running Magnet system. DC/DC, built-in electronic current converter.

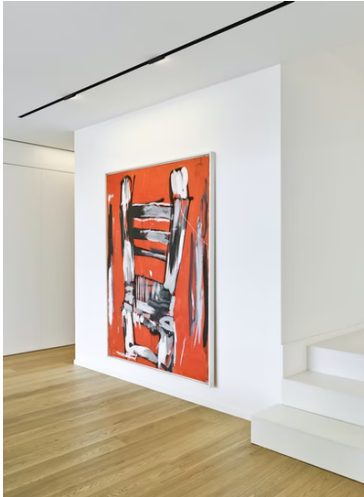


Main specifications

| | | | |
|------------------|-------|----------------|---------------------|
| Lamp category | LED | Net lumen (lm) | 793 |
| Power (W) | 10.8W | Mountings | Track |
| System power (W) | 13.4 | Environment | Indoor dry location |
| CCT (K) | 3000K | | |
| CRI | 90 | | |

Optical

| | |
|------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Medium |
| Beam angle (°) | 22 |
| Beam angle C90-270 (°) | 22 |
| UGRL | 4 |
| Efficiency (lm/W) | 59.18 |



| | | | |
|-------------|------|-------|------|
| Beam Angle: | 22° | | |
| | h(m) | E(lx) | D(m) |
| 1 | 5302 | 0.39 | |
| 2 | 1325 | 0.78 | |
| 3 | 589 | 1.17 | |
| 4 | 331 | 1.56 | |
| 5 | 212 | 1.95 | |

Luminous flux luminaire
793 lm (EXTREME CUT OFF)

Electrical

| | | | |
|-------------|------------------|------------------|-----|
| Voltage (V) | 24.00 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote excluded | | |
| Driver type | Dimmable Casambi | | |
| Emergency | Without | | |

Physical

| | |
|--------------------|-------------|
| Color | Black/White |
| Orientation | Fixed |
| Weight (kg) | 0.34 |
| Length (mm) | 140 |
| Lifespan (L70 B10) | L80B50 |

Note

The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.

