

## Light Shadow Optic Medium Dali Version

■ ■ 03.9621.14ADA - Black/Black

LED lighting module, with 4 spotlights and low glare, to be installed in the The Running Magnet system. DC/DC, built-in electronic current converter.




### Main specifications

|                |       |             |                     |
|----------------|-------|-------------|---------------------|
| Lamp category  | LED   | Mountings   | Track               |
| Power (W)      | 10.8W | Environment | Indoor dry location |
| CCT (K)        | 2700K |             |                     |
| CRI            | 90    |             |                     |
| Net lumen (lm) | 744   |             |                     |

### Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | Power LED |
| Light distribution     | Symmetric |
| Optical type           | Medium    |
| Beam angle (°)         | 22        |
| Beam angle C90-270 (°) | 22        |



Beam Angle: 22°

h(m) E(lx) D(m)

1 5086 0.39



2 1272 0.78

3 565 1.17

4 318 1.56

5 203 1.95

Luminous flux luminaire  
744 lm (EXTREME CUT OFF)

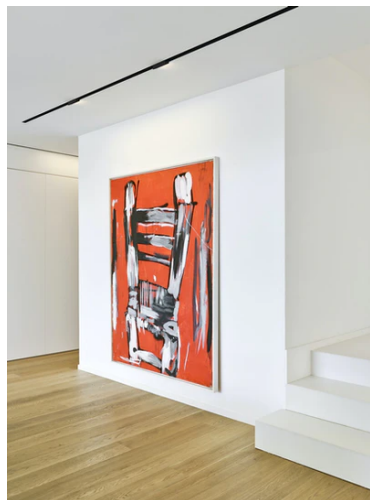

### Electrical

|             |                 |                  |     |
|-------------|-----------------|------------------|-----|
| Voltage (V) | 24.00           | Insulation class | III |
| Dimmable    | Yes             |                  |     |
| Driver      | Remote excluded |                  |     |
| Driver type | Dimmable DALI 1 |                  |     |
| Emergency   | Without         |                  |     |

### Physical

|             |             |
|-------------|-------------|
| Color       | Black/Black |
| Orientation | Fixed       |
| Weight (kg) | 0.34        |
| Length (mm) | 140         |

### Note

For wireless lighting control, choose integrated Casambi versions.

