


## Light Shadow Optic Wide Flood Casambi integrated

New

### 03.9661.14ACB - Black/Black

LED lighting module, with 4 spotlights and low glare, to be installed in the The Running Magnet system. DC/DC, built-in electronic current converter.

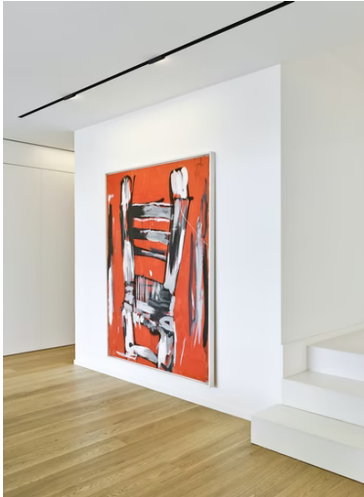


### Main specifications

Lamp category	LED	Net lumen (lm)	731
Power (W)	10.8W	Mountings	Track
System power (W)	13.4	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	47
Beam angle C90-270 (°)	47
UGRL	11
Efficiency (lm/W)	54.55



Beam Angle:	45°		
	h(m)	E(lx)	D(m)
1	1363	0.83	
2	341	1.67	
3	151	2.50	
4	85	3.34	
5	55	4.17	

Luminous flux luminaire  
731 lm (EXTREME CUT OFF)

### Electrical

Voltage (V)	24.00	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Dimmable		
Emergency	Casambi		
	Without		

### Physical

Color	Black/Black
Orientation	Fixed
Weight (kg)	0.34
Length (mm)	140
Lifespan (L70 B10)	L80B50

### Note

The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.

