


## Light Shadow Optic Wide Flood Casambi integrated

New

03.9666.40ACB - White/Chrome

LED lighting module, with 4 spotlights and low glare, to be installed in the The Running Magnet system. DC/DC, built-in electronic current converter.

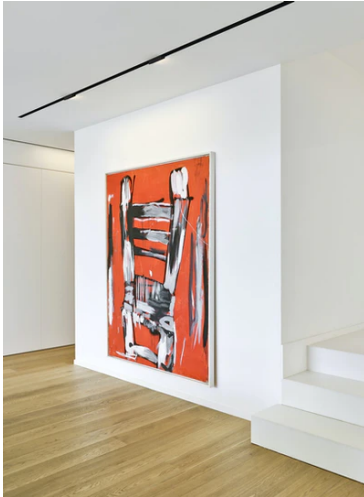


### Main specifications

<b>Lamp category</b>	LED	<b>Mountings</b>	Track
<b>Power (W)</b>	10.8W	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	3000K		
<b>CRI</b>	90		
<b>Net lumen (lm)</b>	789		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	Power LED
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Wide flood
<b>Beam angle (°)</b>	45
<b>Beam angle C90-270 (°)</b>	45



<b>Beam Angle:</b>	44°		
<b>h(m)</b>	<b>E(lx)</b>	<b>D(m)</b>	
1	1644	0.80	
2	411	1.60	
3	183	2.40	
4	103	3.19	
5	66	3.99	

Luminous flux luminaire  
789 lm (EXTREME CUT OFF)

### Electrical

<b>Voltage (V)</b>	24.00	<b>Insulation class</b>	III
<b>Dimmable</b>	Yes		
<b>Driver</b>	Remote excluded		
<b>Driver type</b>	Dimmable		
<b>Emergency</b>	Casambi		
	Without		

### Physical

<b>Color</b>	White/Chrome
<b>Orientation</b>	Fixed
<b>Weight (kg)</b>	0.34
<b>Length (mm)</b>	140

### Note

The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.

