



## Light Shadow Pro Ø 60 Adjustable Optic Medium

New

### 03.9932.14 - Black

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

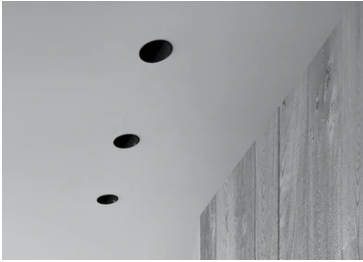


### Main specifications

Number of heads	1	Net lumen (lm)	927
Lamp category	LED	Mountings	Recessed
Power (W)	10W	Environment	Indoor dry location
CCT (K)	4000K		
CRI	90		

### Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	22
Beam angle C90-270 (°)	22

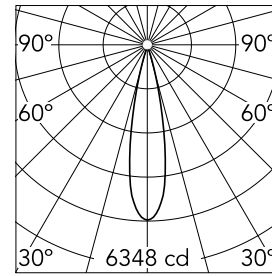

Beam Angle:	22°		
	h(m)	E(lx)	D(m)
1	6348	0.38	
2	1587	0.77	
3	705	1.15	
4	397	1.54	
5	254	1.92	

Luminous flux luminaire  
927 lm

### Electrical

Current (mA)	300	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming		
Emergency	Without		

### Physical

Color	Black	Rotation (°)	355
Orientation	Adjustable	Spot diameter (mm)	60
Recessed depth (mm)	93		
Weight (kg)	0.22		
Tilt (°)	30		



## Light Shadow Pro Ø 60 Adjustable Optic Medium



---

Installation Frame Trim  
08.0164.14

---

Installation Frame No Trim  
08.0166.00

---

Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200 mA – 8,5W / 300 mA – 13W / 350 mA – 15W / 400 mA – 17,5W / 450 mA – 19,5W / 500 mA – 22W  
60.9160



---

Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W  
60.9439

---

Installation Frame Trim  
08.0164.40

---

Continuous current supply source 240V – 50/60Hz with dimmable DALI 2, push dimming. 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W 700/750/800/900/950/1000/1050mA-38W  
60.9186



---

Continuous current power supply of  
13-20W, 110/240V – 50/60Hz with power  
current selected through adjustable  
300 mA – 15W / 350 mA – 18W /  
400/450/500/550/600/  
650/700/750/800/850/900 mA – 15W.  
switch. 0/1-10V or push dimming  
60.9188

---

Continuous current power supply,  
Mains dimming, leading & trailing edge  
220/240V – 50/60Hz, 300mA-14W /  
350mA-17W / 400mA-19W /  
450/500/600/650/700/750/800/900mA –  
20W  
60.9467

---

Continuous current power supply,  
dimmable Casambi 220/240V-50/60Hz,  
300mA-16W / 350mA-18,5W / 400mA-  
21,5W / 450mA-24W / 500mA-27W /  
600mA-32W / 650mA-35W / 700mA-36W  
/750/800/900/950/1000/1050/1200mA –  
38W  
60.9207