



## Light Shadow Pro Ø 60 Adjustable Optic Spot

New

03.9971.GL - Gold

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

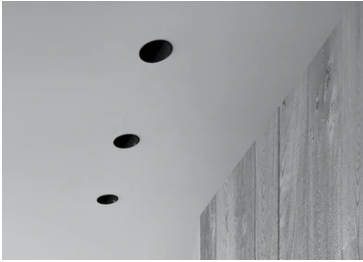


### Main specifications

Number of heads	1	Net lumen (lm)	672
Lamp category	LED	Mountings	Recessed
Power (W)	10,5W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

### Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	16
Beam angle C90-270 (°)	16

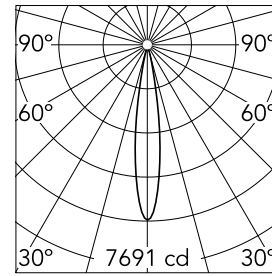

Beam Angle:	16°		
	h(m)	E(lx)	D(m)
1	7691	0.28	
2	1923	0.56	
3	855	0.84	
4	481	1.12	
5	308	1.40	

Luminous flux luminaire  
672 lm

### Electrical

Current (mA)	300	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming		
Emergency	Without		

### Physical

Color	Gold	Rotation (°)	355
Orientation	Adjustable	Spot diameter (mm)	60
Recessed depth (mm)	93		
Weight (kg)	0.22		
Tilt (°)	30		

### Note

Preliminary photometries.



## Light Shadow Pro Ø 60 Adjustable Optic Spot



---

Installation Frame Trim  
08.0164.14

Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable switch. 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/650/700/750/800/850/900 mA – 15W. 0/1-10V or push dimming  
60.9188

Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W  
60.9439



---

Installation Frame Trim  
08.0164.40

Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W  
60.9207

Continuous current power supply, Mains dimming, leading & trailing edge 220/240V – 50/60Hz, 300mA-14W / 350mA-17W / 400mA-19W / 450/500/600/650/700/750/800/900mA – 20W  
60.9467



---

Installation Frame No Trim  
08.0166.00



---

Continuous current supply source 240V  
– 50/60Hz with dimmable DALI 2, push  
dimming. 300mA-16W / 350mA-18W /  
400mA-21W / 500mA-27W / 600mA-32W  
/ 650mA-35W  
700/750/800/900/950/1000/1050mA-38W  
60.9186



---

Non dimmable continuous current  
power supply of 220/240V – 50/60Hz  
with power current selected through  
adjustable with switch 200 mA – 8,5W /  
300 mA – 13W / 350 mA – 15W / 400 mA  
– 17,5W / 450 mA – 19,5W / 500 mA –  
22W  
60.9160