




## Light Shadow Pro Ø 60 Fixed Optic Flood

New

03.9956.06 - Chrome

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

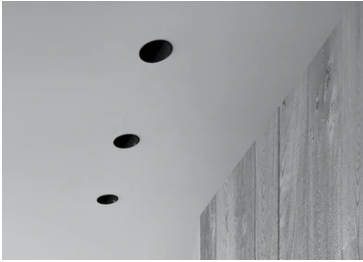


### Main specifications

|                        |       |                       |                     |
|------------------------|-------|-----------------------|---------------------|
| <b>Number of heads</b> | 1     | <b>Net lumen (lm)</b> | 1272                |
| <b>Lamp category</b>   | LED   | <b>Mountings</b>      | Recessed            |
| <b>Power (W)</b>       | 15W   | <b>Environment</b>    | Indoor dry location |
| <b>CCT (K)</b>         | 3000K |                       |                     |
| <b>CRI</b>             | 90    |                       |                     |

### Optical

|                               |           |
|-------------------------------|-----------|
| <b>Lighting type</b>          | Direct    |
| <b>LED type</b>               | LED array |
| <b>Light distribution</b>     | Symmetric |
| <b>Optical type</b>           | Flood     |
| <b>Beam angle (°)</b>         | 34        |
| <b>Beam angle C90-270 (°)</b> | 34        |

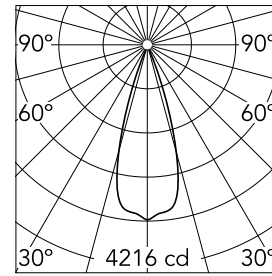

|                    |              |             |  |
|--------------------|--------------|-------------|--|
| <b>Beam Angle:</b> | 34°          |             |  |
| <b>h(m)</b>        | <b>E(lx)</b> | <b>D(m)</b> |  |
| 1                  | 4216         | 0.61        |  |
| 2                  | 1054         | 1.22        |  |
| 3                  | 468          | 1.82        |  |
| 4                  | 264          | 2.43        |  |
| 5                  | 169          | 3.04        |  |

Luminous flux luminaire  
1272 lm

### Electrical

|                     |   |                         |     |
|---------------------|---|-------------------------|-----|
| <b>Current (mA)</b> | 400   | <b>Insulation class</b> | III |
| <b>Dimmable</b>     | Yes   |                         |     |
| <b>Driver</b>       | Remote excluded   |                         |     |
| <b>Driver type</b>  | Non Dimmable, Dimmable DALI 2, Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming |                         |     |
| <b>Emergency</b>    | Without   |                         |     |

### Physical

|                            |        |
|----------------------------|--------|
| <b>Color</b>               | Chrome |
| <b>Orientation</b>         | Fixed  |
| <b>Recessed depth (mm)</b> | 91     |
| <b>Weight (kg)</b>         | 0.22   |
| <b>Spot diameter (mm)</b>  | 60     |

### Note

Please select 300 mA setting in the remote driver to match the power of the Adjustable version.

## Light Shadow Pro Ø 60 Fixed Optic Flood



---

Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200 mA – 8,5W / 300 mA – 13W / 350 mA – 15W / 400 mA – 17,5W / 450 mA – 19,5W / 500 mA – 22W  
60.9160

---

Continuous current power supply, Mains dimming, leading & trailing edge 220/240V – 50/60Hz, 300mA-14W / 350mA-17W / 400mA-19W / 450/500/600/650/700/750/800/900mA – 20W  
60.9467

---

Continuous current supply source 240V – 50/60Hz with dimmable DALI 2, push dimming. 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W  
700/750/800/900/950/1000/1050mA-38W  
60.9186



---

Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming  
60.9188

---

Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W  
60.9439

---

Installation Frame Trim  
08.0160.40



---

Installation Frame Trim  
08.0160.14

---

Continuous current power supply of  
12-20W, 110/240V – 50/60Hz with power  
current selected through adjustable  
350mA – 17W / 400mA – 19W / 450 / 550  
/ 600 / 700mA – 20W regulable Dali 1 y  
Dali 2  
60.9222

---

Installation Frame No Trim  
08.0192.00