



## Light Shadow Pro Ø 60 Fixed Optic Flood

New

03.9956.GL - Gold

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

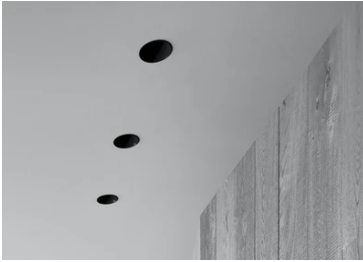


### Main specifications

Number of heads	1	Net lumen (lm)	1239
Lamp category	LED	Mountings	Recessed
Power (W)	15W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

### Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	34
Beam angle C90-270 (°)	34



Beam Angle:	34°	
	h(m)	E(lx) D(m)
1	4053	0.61
2	1013	1.23
3	450	1.84
4	253	2.46
5	162	3.07

Luminous flux luminaire  
1239 lm

### Electrical

Current (mA)	400	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming		
Emergency	Without		

### Physical

Color	Gold
Orientation	Fixed
Recessed depth (mm)	91
Weight (kg)	0.22
Spot diameter (mm)	60

### Note

Please select 300 mA setting in the remote driver to match the power of the Adjustable version.

## Light Shadow Pro Ø 60 Fixed Optic Flood



---

Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W 60.9439



---

Continuous current supply source 240V – 50/60Hz with dimmable DALI 2, push dimming. 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W 700/750/800/900/950/1000/1050mA-38W 60.9186



---

Installation Frame Trim 08.0160.14



---

Installation Frame No Trim 08.0192.00



---

Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming 60.9188



---

Continuous current power supply, Mains dimming, leading & trailing edge 220/240V – 50/60Hz, 300mA-14W / 350mA-17W / 400mA-19W / 450/500/600/650/700/750/800/900mA – 20W 60.9467



---

Continuous current power supply,  
dimmable Casambi 220/240V-50/60Hz,  
300mA-16W / 350mA-18,5W / 400mA-  
21,5W / 450mA-24W / 500mA-27W /  
600mA-32W / 650mA-35W / 700mA-36W  
/750/800/900/1000/1050mA – 38W  
60.9207

---

Continuous current power supply of  
12-20W, 110/240V – 50/60Hz with power  
current selected through adjustable  
350mA – 17W / 400mA – 19W / 450 / 550  
/ 600 / 700mA – 20W regulable Dali 1 y  
Dali 2  
60.9222

---

Non dimmable continuous current  
power supply of 220/240V – 50/60Hz  
with power current selected through  
adjustable with switch 200 mA – 8,5W /  
300 mA – 13W / 350 mA – 15W / 400 mA  
– 17,5W / 450 mA – 19,5W / 500 mA –  
22W  
60.9160



---

Installation Frame Trim  
08.0160.40