



## Light Shadow Pro Ø 90 Adjustable Optic Flood

New

03.9988.06 - Chrome

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

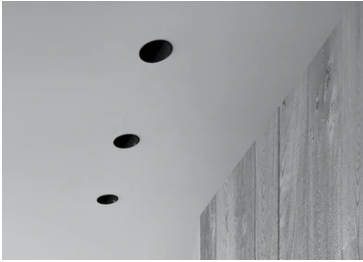


### Main specifications

Number of heads	1	Net lumen (lm)	1495
Lamp category	LED	Mountings	Recessed
Power (W)	18W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

### Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	33
Beam angle C90-270 (°)	33

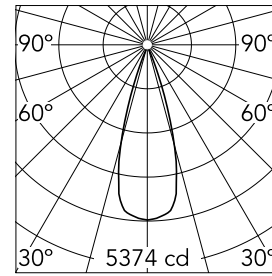

Beam Angle:	33°	
	h(m)	E(lx) D(m)
1	5374	0.59
2	1344	1.17
3	597	1.76
4	336	2.35
5	215	2.93

Luminous flux luminaire  
1495 lm


### Electrical

Current (mA)	500	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming		
Emergency	Without		

### Physical

Color	Chrome	Rotation (°)	355
Orientation	Adjustable	Spot diameter (mm)	90
Recessed depth (mm)	111		
Weight (kg)	0.54		
Tilt (°)	35		

## Light Shadow Pro Ø 90 Adjustable Optic Flood

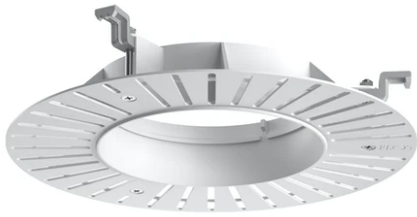

Installation Frame No Trim  
08.0167.00



Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz,  
300mA-16W / 350mA-18W / 400mA-21W  
/ 500mA-27W / 600mA-32W / 650mA-35W /  
700/750/800/900/950/1000/1050mA-36W  
60.9439



Installation Frame Trim  
08.0165.40



Installation Frame Trim  
08.0165.14



Continuous current power supply  
220/240V – 50/60Hz. Adjustable Current  
300mA-13W / 350mA-15W / 400mA-18W  
/ 450mA-20W / 500mA-22W / 550mA-24W /  
600mA-27W / 650mA-29W / 700mA-31W /  
750mA-32W / 800mA-33W / 850mA-35W /  
900mA-38W / 950mA-40W / 1000/1050mA-42W  
60.9162



Continuous current power supply of  
12-20W, 110/240V – 50/60Hz with power  
current selected through adjustable  
350mA – 17W / 400mA – 19W / 450 / 550  
/ 600 / 700mA – 20W regulable Dali 1 y  
Dali 2  
60.9222



---

Continuous current power supply of  
13-20W, 110/240V – 50/60Hz with power  
current selected through adjustable  
300 mA – 15W / 350 mA – 18W /  
400/450/500/550/600/  
650/700/750/800/850/900 mA – 15W.  
switch. 0/1-10V or push dimming  
60.9188



---

Continuous current supply source 240V  
– 50/60Hz with dimmable DALI 2, push  
dimming. 300mA-16W / 350mA-18W /  
400mA-21W / 500mA-27W / 600mA-32W  
/ 650mA-35W  
700/750/800/900/950/1000/1050mA-38W  
60.9186



---

Continuous current power supply,  
Mains dimming, leading & trailing edge  
220/240V – 50/60Hz, 300mA-14W /  
350mA-17W / 400mA-19W /  
450/500/600/650/700/750/800/900mA –  
20W  
60.9467



---

Continuous current power supply,  
dimmable Casambi 220/240V-50/60Hz,  
300mA-16W / 350mA-18,5W / 400mA-  
21,5W / 450mA-24W / 500mA-27W /  
600mA-32W / 650mA-35W / 700mA-36W  
/750/800/900/1000/1050mA – 38W  
60.9207