


## Light Shadow Pro Ø 90 Adjustable Optic Medium

New

03.9982.06 - Chrome

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.




### Main specifications

|                        |       |                       |                     |
|------------------------|-------|-----------------------|---------------------|
| <b>Number of heads</b> | 1     | <b>Net lumen (lm)</b> | 1332                |
| <b>Lamp category</b>   | LED   | <b>Mountings</b>      | Recessed            |
| <b>Power (W)</b>       | 18W   | <b>Environment</b>    | Indoor dry location |
| <b>CCT (K)</b>         | 2700K |                       |                     |
| <b>CRI</b>             | 90    |                       |                     |

### Optical

|                               |           |
|-------------------------------|-----------|
| <b>Lighting type</b>          | Direct    |
| <b>LED type</b>               | LED array |
| <b>Light distribution</b>     | Symmetric |
| <b>Optical type</b>           | Medium    |
| <b>Beam angle (°)</b>         | 24        |
| <b>Beam angle C90-270 (°)</b> | 24        |

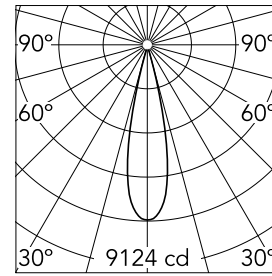

|                    |              |             |  |
|--------------------|--------------|-------------|--|
| <b>Beam Angle:</b> | 24°          |             |  |
| <b>h(m)</b>        | <b>E(lx)</b> | <b>D(m)</b> |  |
| 1                  | 9124         | 0.42        |  |
| 2                  | 2281         | 0.83        |  |
| 3                  | 1014         | 1.25        |  |
| 4                  | 570          | 1.67        |  |
| 5                  | 365          | 2.09        |  |

Luminous flux luminaire  
1332 lm


### Electrical

|                     |   |                         |     |
|---------------------|---|-------------------------|-----|
| <b>Current (mA)</b> | 500   | <b>Insulation class</b> | III |
| <b>Dimmable</b>     | Yes   |                         |     |
| <b>Driver</b>       | Remote excluded   |                         |     |
| <b>Driver type</b>  | Non Dimmable, Dimmable DALI 2, Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming |                         |     |
| <b>Emergency</b>    | Without   |                         |     |

### Physical

|                            |            |                           |     |
|----------------------------|------------|---------------------------|-----|
| <b>Color</b>               | Chrome     | <b>Rotation (°)</b>       | 355 |
| <b>Orientation</b>         | Adjustable | <b>Spot diameter (mm)</b> | 90  |
| <b>Recessed depth (mm)</b> | 111        |                           |     |
| <b>Weight (kg)</b>         | 0.54       |                           |     |
| <b>Tilt (°)</b>            | 35         |                           |     |

## Light Shadow Pro Ø 90 Adjustable Optic Medium

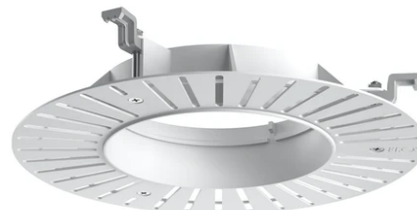

Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming  
60.9188

Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2  
60.9222

Installation Frame No Trim  
08.0167.00



Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W  
60.9439

Continuous current power supply, Mains dimming, leading & trailing edge 220/240V – 50/60Hz, 300mA-14W / 350mA-17W / 400mA-19W / 450/500/600/650/700/750/800/900mA – 20W  
60.9467

Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W  
60.9207



---

Installation Frame Trim  
08.0165.40



---

Installation Frame Trim  
08.0165.14



---

Continuous current supply source 240V  
– 50/60Hz with dimmable DALI 2, push  
dimming. 300mA-16W / 350mA-18W /  
400mA-21W / 500mA-27W / 600mA-32W  
/ 650mA-35W  
700/750/800/900/950/1000/1050mA-38W  
60.9186



---

Continuous current power supply  
220/240V – 50/60Hz. Adjustable Current  
300mA-13W / 350mA-15W / 400mA-18W  
/ 450mA-20W / 500mA-22W / 550mA-  
24W / 600mA-27W / 650mA-29W /  
700mA-31W / 750mA-32W / 800mA-33W  
/ 850mA-35W / 900mA-38W / 950mA-  
40W / 1000/1050mA-42W  
60.9162