


Light Shadow Pro Ø 90 Adjustable Optic Spot

New

03.9941.GL - Gold

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.




Main specifications

| | | | |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 1510 |
| Lamp category | LED | Mountings | Recessed |
| Power (W) | 18W | Environment | Indoor dry location |
| CCT (K) | 4000K | | |
| CRI | 90 | | |

Optical

| | |
|------------------------|-----------|
| Lighting type | Direct |
| LED type | LED array |
| Light distribution | Symmetric |
| Optical type | Spot |
| Beam angle (°) | 16 |
| Beam angle C90-270 (°) | 16 |

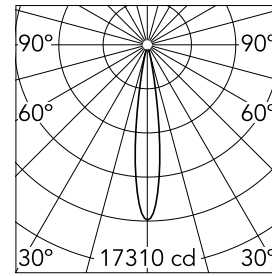

| | | |
|-------------|-------|------|
| Beam Angle: | 16° | |
| h(m) | E(lx) | D(m) |
| 1 | 17310 | 0.27 |
| 2 | 4328 | 0.55 |
| 3 | 1923 | 0.82 |
| 4 | 1082 | 1.09 |
| 5 | 692 | 1.36 |

Luminous flux luminaire
1510 lm

Electrical

| | | | |
|--------------|---|------------------|-----|
| Current (mA) | 500 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote excluded | | |
| Driver type | Non Dimmable, Dimmable DALI 2, Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming | | |
| Emergency | Without | | |

Physical

| | | | |
|---------------------|------------|--------------------|-----|
| Color | Gold | Rotation (°) | 355 |
| Orientation | Adjustable | Spot diameter (mm) | 90 |
| Recessed depth (mm) | 111 | | |
| Weight (kg) | 0.54 | | |
| Tilt (°) | 35 | | |

Light Shadow Pro Ø 90 Adjustable Optic Spot



Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2
60.9222

Continuous current power supply 220/240V – 50/60Hz. Adjustable Current 300mA-13W / 350mA-15W / 400mA-18W / 450mA-20W / 500mA-22W / 550mA-24W / 600mA-27W / 650mA-29W / 700mA-31W / 750mA-32W / 800mA-33W / 850mA-35W / 900mA-38W / 950mA-40W / 1000/1050mA-42W
60.9162


Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W
60.9439



Installation Frame Trim
08.0165.40

Installation Frame Trim
08.0165.14

Continuous current power supply, Mains dimming, leading & trailing edge 220/240V – 50/60Hz, 300mA-14W / 350mA-17W / 400mA-19W / 450/500/600/650/700/750/800/900mA – 20W
60.9467

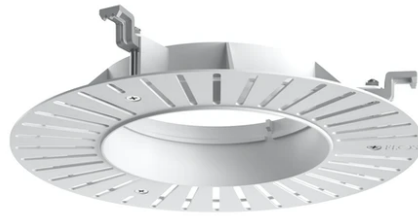

Continuous current power supply,
dimmable Casambi 220/240V-50/60Hz,
300mA-16W / 350mA-18,5W / 400mA-
21,5W / 450mA-24W / 500mA-27W /
600mA-32W / 650mA-35W / 700mA-36W
/750/800/900/950/1000/1050/1200mA –
38W
60.9207

Installation Frame No Trim
08.0167.00

Continuous current supply source 240V
– 50/60Hz with dimmable DALI 2, push
dimming. 300mA-16W / 350mA-18W /
400mA-21W / 500mA-27W / 600mA-32W
/ 650mA-35W
700/750/800/900/950/1000/1050mA-38W
60.9186



Continuous current power supply of
13-20W, 110/240V – 50/60Hz with power
current selected through adjustable
300 mA – 15W / 350 mA – 18W /
400/450/500/550/600/
650/700/750/800/850/900 mA – 15W.
switch. 0/1-10V or push dimming
60.9188