


## Light Shadow Pro Ø 90 Adjustable Optic Spot

New

■ 03.9986.14 - Black

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.




### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	1385
<b>Lamp category</b>	LED	<b>Mountings</b>	Recessed
<b>Power (W)</b>	18W	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	3000K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	LED array
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Spot
<b>Beam angle (°)</b>	15
<b>Beam angle C90-270 (°)</b>	15

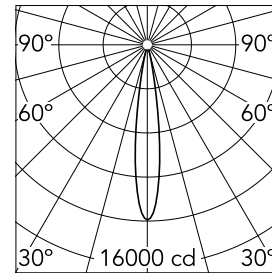

<b>Beam Angle:</b>	15°
<b>h(m)</b>	<b>E(lx)</b> <b>D(m)</b>
1	16000   0.27
2	4000   0.54
3	1778   0.82
4	1000   1.09
5	640   1.36

Luminous flux luminaire  
1385 lm

### Electrical

<b>Current (mA)</b>	500	<b>Insulation class</b>	III
<b>Dimmable</b>	Yes		
<b>Driver</b>	Remote excluded		
<b>Driver type</b>	Non Dimmable, Dimmable DALI 2, Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming		
<b>Emergency</b>	Without		

### Physical

<b>Color</b>	Black	<b>Rotation (°)</b>	355
<b>Orientation</b>	Adjustable	<b>Spot diameter (mm)</b>	90
<b>Recessed depth (mm)</b>	111		
<b>Weight (kg)</b>	0.54		
<b>Tilt (°)</b>	35		

## Light Shadow Pro Ø 90 Adjustable Optic Spot



Continuous current power supply,  
Mains dimming, leading & trailing edge  
220/240V – 50/60Hz, 300mA-14W /  
350mA-17W / 400mA-19W /  
450/500/600/650/700/750/800/900mA –  
20W  
60.9467

Continuous current power supply,  
dimmable Casambi 220/240V-50/60Hz,  
300mA-16W / 350mA-18,5W / 400mA-  
21,5W / 450mA-24W / 500mA-27W /  
600mA-32W / 650mA-35W / 700mA-36W  
/750/800/900/950/1000/1050/1200mA –  
38W  
60.9207


Continuous current supply source 240V  
– 50/60Hz with dimmable DALI 2, push  
dimming. 300mA-16W / 350mA-18W /  
400mA-21W / 500mA-27W / 600mA-32W  
/ 650mA-35W  
700/750/800/900/950/1000/1050mA-38W  
60.9186



Continuous current power supply  
220/240V – 50/60Hz. Adjustable Current  
300mA-13W / 350mA-15W / 400mA-18W  
/ 450mA-20W / 500mA-22W / 550mA-  
24W / 600mA-27W / 650mA-29W /  
700mA-31W / 750mA-32W / 800mA-33W  
/ 850mA-35W / 900mA-38W / 950mA-  
40W / 1000/1050mA-42W  
60.9162

Continuous current power supply of  
13-20W, 110/240V – 50/60Hz with power  
current selected through adjustable  
300 mA – 15W / 350 mA – 18W /  
400/450/500/550/600/  
650/700/750/800/850/900 mA – 15W.  
switch. 0/1-10V or push dimming  
60.9188

Continuous current power supply of  
12-20W, 110/240V – 50/60Hz with power  
current selected through adjustable  
350mA – 17W / 400mA – 19W / 450 / 550  
/ 600 / 700mA – 20W regulable Dali 1 y  
Dali 2  
60.9222

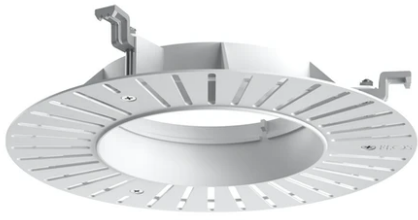

---

Installation Frame No Trim  
08.0167.00



---

Installation Frame Trim  
08.0165.40



---

Installation Frame Trim  
08.0165.14



---

Continuous current power supply, 0/1-  
10V dimmable, 220/240V – 50/60Hz,  
300mA-16W / 350mA-18W / 400mA-21W  
/ 500mA-27W / 600mA-32W / 650mA-  
35W /  
700/750/800/900/950/1000/1050mA-36W  
60.9439