



Light Shadow Pro Ø 90 Fixed Optic Flood


New

03.9962.06 - Chrome

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.


Main specifications

| | | | |
|------------------------|-------|-----------------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 1799 |
| Lamp category | LED | Mountings | Recessed |
| Power (W) | 22W | Environment | Indoor dry location |
| CCT (K) | 2700K | | |
| CRI | 90 | | |

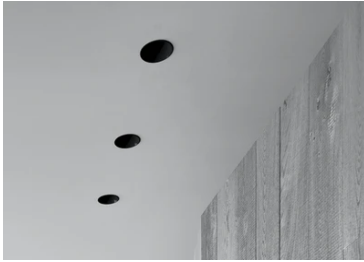

Optical


| | |
|-------------------------------|-----------|
| Lighting type | Direct |
| LED type | LED array |
| Light distribution | Symmetric |
| Optical type | Flood |
| Beam angle (°) | 39 |
| Beam angle C90-270 (°) | 39 |

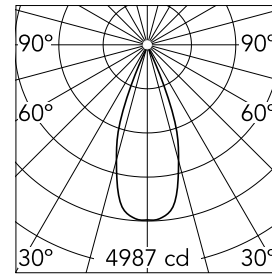

Beam Angle: 39°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 4987 | 0.70 |
| 2 | 1247 | 1.40 |
| 3 | 554 | 2.10 |
| 4 | 312 | 2.81 |
| 5 | 199 | 3.51 |

Luminous flux luminaire
1799 lm



Electrical

| | | | |
|---------------------|---|-------------------------|-----|
| Current (mA) | 600 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote excluded | | |
| Driver type | Non Dimmable, Dimmable DALI 2, Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming | | |
| Emergency | Without | | |

Physical

| | |
|----------------------------|--------|
| Color | Chrome |
| Orientation | Fixed |
| Recessed depth (mm) | 129 |
| Weight (kg) | 0.54 |
| Spot diameter (mm) | 90 |

Note

Please select 500 mA setting in the remote driver to match the power of the Adjustable version.



Light Shadow Pro Ø 90 Fixed Optic Flood



Continuous current power supply
220/240V – 50/60Hz. Adjustable Current
300mA-13W / 350mA-15W / 400mA-18W
/ 450mA-20W / 500mA-22W / 550mA-
24W / 600mA-27W / 650mA-29W /
700mA-31W / 750mA-32W / 800mA-33W
/ 850mA-35W / 900mA-38W / 950mA-
40W / 1000/1050mA-42W
60.9162

Continuous current power supply of
13-20W, 110/240V – 50/60Hz with power
current selected through adjustable
300 mA – 15W / 350 mA – 18W /
400/450/500/550/600/
650/700/750/800/850/900 mA – 15W.
switch. 0/1-10V or push dimming
60.9188

Installation Frame Trim
08.0161.14



Installation Frame Trim
08.0161.40

Non dimmable continuous current
power supply of 24W, 110/277V –
50/60Hz, with power current selected
through adjustable 500 mA/600 mA
switch
60.9523

Installation Frame No Trim
08.0193.00



Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2
60.9222



Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/950/1000/1050/1200mA – 38W
60.9207



Continuous current power supply, Mains dimming, leading & trailing edge 220/240V – 50/60Hz, 300mA-14W / 350mA-17W / 400mA-19W / 450/500/600/650/700/750/800/900mA – 20W
60.9467



Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W
60.9439



Continuous current supply source 240V – 50/60Hz with dimmable DALI 2, push dimming. 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W 700/750/800/900/950/1000/1050mA-38W
60.9186