

## Light Shadow Pro Ø60 Adjustable Optic Spot

03.9971.40 - White

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.




## Main specifications

|                 |       |                |          |
|-----------------|-------|----------------|----------|
| Number of heads | 1     | Net lumen (lm) | 672      |
| Lamp category   | LED   | Mountings      | Recessed |
| Power (W)       | 10,5W | Environment    | Indoor   |
| CCT (K)         | 2700K |                |          |
| CRI             | 90    |                |          |

## Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | LED array |
| Light distribution     | Symmetric |
| Optical type           | Spot      |
| Beam angle (°)         | 16        |
| Beam angle C90-270 (°) | 16        |



Beam Angle: 16°

h(m) E(lx) D(m)

|   |      |      |
|---|------|------|
| 1 | 7691 | 0.28 |
| 2 | 1923 | 0.56 |
| 3 | 855  | 0.84 |
| 4 | 481  | 1.12 |
| 5 | 308  | 1.40 |

Luminous flux luminaire  
672 lm

## Electrical




|              |                                                                              |                  |     |
|--------------|------------------------------------------------------------------------------|------------------|-----|
| Current (mA) | 750                                                                          | Insulation class | III |
| Dimmable     | Yes                                                                          |                  |     |
| Driver       | Remote                                                                       |                  |     |
| Driver type  | Electronic,<br>Electronic<br>dimmable 1-<br>10V, Electronic<br>dimmable DALI |                  |     |
| Emergency    | Without                                                                      |                  |     |

## Physical

|                     |            |                    |     |
|---------------------|------------|--------------------|-----|
| Color               | White      | Rotation (°)       | 355 |
| Orientation         | Adjustable | Spot diameter (mm) | 60  |
| Recessed depth (mm) | 93         |                    |     |
| Weight (kg)         | 0.22       |                    |     |
| Tilt (°)            | 30         |                    |     |

## Note

Preliminary photometries.

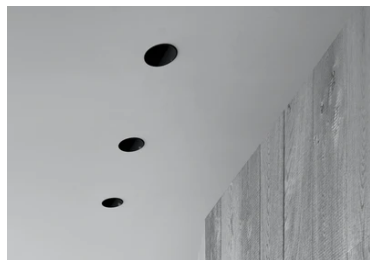

Light Shadow Pro Ø60 Adjustable Optic Spot



Installation Frame Trim  
08.0164.40

Installation Frame Trim  
08.0164.14

Installation Frame No Trim  
08.0166.00



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200mA – 8,5W / 250mA – 11W / 300mA – 13W / 350mA – 15W / 400mA – 17,5W / 450mA 19,5W / 500mA – 22W.  
60.9160

Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 36W – 700 mA  
60.9439

Continuous current supply source of 240V – 50/60Hz with dimmable DALI 2  
60.9186



Continuous current power supply of

Continuous current power supply of

Continuous current power supply,

switch  
60.9162

adjustable switch. 1-10V or push  
dimming.  
60.9188

20W  
60.9467



---

Continuous current power supply,  
dimmable Casambi, 220/240V –  
50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207