

## Light Shadow Pro Ø60 Adjustable Optic Wide Flood

03.9974.06 - Chrome



LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.


LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

### Main specifications

Number of heads	1	Net lumen (lm)	672
Lamp category	LED	Mountings	Recessed
Power (W)	10W	Environment	Indoor
CCT (K)	2700K		
CRI	90		

### Optical



Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	49
Beam angle C90-270 (°)	49

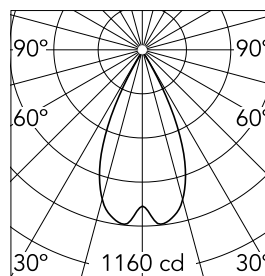

Luminous flux luminaire  
672 lm

Beam Angle: 49°

	h(m)	E(lx)	D(m)
1	1160	0.91	
2	290	1.82	
3	129	2.73	
4	72	3.64	
5	46	4.55	

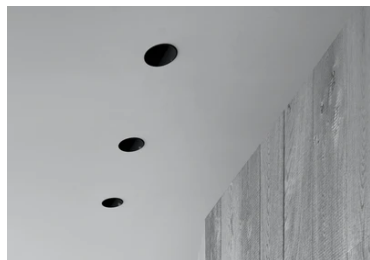

### Electrical

Current (mA)	250	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable 1- 10V, Electronic dimmable DALI Without		

### Emergency


### Physical

Color	Chrome	Spot diameter (mm)	60
Orientation	Adjustable		
Recessed depth (mm)	93		
Weight (kg)	0.22		
Tilt (°)	30		

### Note

Preliminary photometries.

### Certification / Marking



Light Shadow Pro Ø60 Adjustable Optic Wide Flood



---

Installation Frame Trim  
08.0164.40

---

Installation Frame Trim  
08.0164.14

---

Installation Frame No Trim  
08.0166.00