



Light Shadow Pro Ø60 Adjustable Optic Wide Flood


03.9974.GL - Gold

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

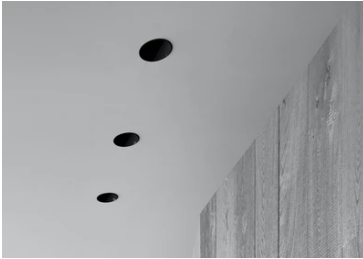

Certification / Marking




Main specifications

Number of heads	1	Net lumen (lm)	672
Lamp category	LED	Mountings	Recessed
Power (W)	10W	Environment	Indoor
CCT (K)	2700K		
CRI	90		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	49
Beam angle C90-270 (°)	49



Luminous flux luminaire
672 lm

Beam Angle: 49°

	h(m)	E(lx)	D(m)
1	1160	0.91	
2	290	1.82	
3	129	2.73	
4	72	3.64	
5	46	4.55	

Electrical

Current (mA)	250	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable 1- 10V, Electronic dimmable DALI Without		

Emergency

Physical

Color	Gold	Spot diameter (mm)	60
Orientation	Adjustable		
Recessed depth (mm)	93		
Weight (kg)	0.22		
Tilt (°)	30		

Note

Preliminary photometries.

Light Shadow Pro Ø60 Adjustable Optic Wide Flood



Installation Frame Trim
08.0164.40

Installation Frame Trim
08.0164.14

Installation Frame No Trim
08.0166.00