

**Light Shadow Pro Ø60 Fixed Optic Spot**■ **03.9954.14 - Black**


LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

**Main specifications**

|                 |       |                |          |
|-----------------|-------|----------------|----------|
| Number of heads | 1     | Net lumen (lm) | 1187     |
| Lamp category   | LED   | Mountings      | Recessed |
| Power (W)       | 15W   | Environment    | Indoor   |
| CCT (K)         | 3000K |                |          |
| CRI             | 90    |                |          |

**Optical**

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | LED array |
| Light distribution     | Symmetric |
| Optical type           | Spot      |
| Beam angle (°)         | 15        |
| Beam angle C90-270 (°) | 15        |



Beam Angle: 15°

|  | h(m) | E(lx) | D(m) |
|--|------|-------|------|
|--|------|-------|------|

|   |       |      |
|---|-------|------|
| 1 | 13784 | 0.27 |
|---|-------|------|

|   |      |      |
|---|------|------|
| 2 | 3446 | 0.54 |
|---|------|------|

|   |      |      |
|---|------|------|
| 3 | 1532 | 0.82 |
|---|------|------|

|   |     |      |
|---|-----|------|
| 4 | 861 | 1.09 |
|---|-----|------|

|   |     |      |
|---|-----|------|
| 5 | 551 | 1.36 |
|---|-----|------|




Luminous flux luminaire  
1187 lm

**Electrical**

|              |                                                                              |                  |     |
|--------------|------------------------------------------------------------------------------|------------------|-----|
| Current (mA) | 400                                                                          | Insulation class | III |
| Dimmable     | Yes                                                                          |                  |     |
| Driver       | Remote                                                                       |                  |     |
| Driver type  | Electronic,<br>Electronic<br>dimnable 1-<br>10V, Electronic<br>dimnable DALI |                  |     |
| Emergency    | Without                                                                      |                  |     |

**Physical**

|                     |       |
|---------------------|-------|
| Color               | Black |
| Orientation         | Fixed |
| Recessed depth (mm) | 91    |
| Weight (kg)         | 0.22  |
| Spot diameter (mm)  | 60    |

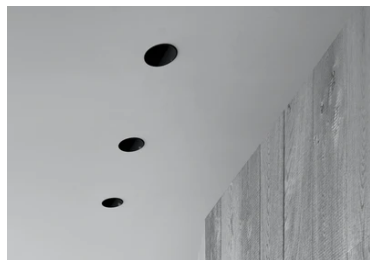

Light Shadow Pro Ø60 Fixed Optic Spot



Installation Frame Trim  
08.0160.40



Installation Frame Trim  
08.0160.14



Installation Frame No Trim  
08.0162.00



Non dimmable continuous current  
power supply of 220/240V – 50/60Hz  
with power current selected through  
adjustable with switch 200mA – 8,5W /  
250mA – 11W / 300mA – 13W / 350mA –  
15W / 400mA – 17,5W / 450mA 19,5W /  
500mA – 22W.  
60.9160



Continuous current power supply, 0/1-  
10V dimmable, 220/240V – 50/60Hz,  
36W – 700 mA  
60.9439



Continuous current supply source of  
240V – 50/60Hz with dimmable DALI 2  
60.9186



Continuous current power supply of  
18-28W 220/240V – 50/60Hz



Continuous current power supply of  
18-28W 220/240V – 50/60Hz



Continuous current power supply of  
18-28W 220/240V – 50/60Hz

switch  
60.9162

adjustable switch. 1-10V or push  
dimming.  
60.9188

adjustable. Regulable DALI 1 y DALI 2  
60.9222



---

Continuous current power supply,  
Mains dimming 220/240V – 50/60Hz, 12-  
20W  
60.9467

---

Continuous current power supply,  
dimmable Casambi, 220/240V –  
50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207