

## Light Shadow Pro Ø60 Fixed Optic Wide Flood

■ 03.9953.14 - Black

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.




### Main specifications

|                 |       |                |          |
|-----------------|-------|----------------|----------|
| Number of heads | 1     | Net lumen (lm) | 1154     |
| Lamp category   | LED   | Mountings      | Recessed |
| Power (W)       | 15W   | Environment    | Indoor   |
| CCT (K)         | 2700K |                |          |
| CRI             | 90    |                |          |

### Optical

|                        |            |
|------------------------|------------|
| Lighting type          | Direct     |
| LED type               | LED array  |
| Light distribution     | Symmetric  |
| Optical type           | Wide flood |
| Beam angle (°)         | 51         |
| Beam angle C90-270 (°) | 51         |



Beam Angle: 51°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 1549  | 0.95 |
| 2    | 387   | 1.89 |
| 3    | 172   | 2.84 |
| 4    | 97    | 3.79 |
| 5    | 62    | 4.74 |




Luminous flux luminaire  
1154 lm

### Electrical

|              |                                                                              |                  |     |
|--------------|------------------------------------------------------------------------------|------------------|-----|
| Current (mA) | 400                                                                          | Insulation class | III |
| Dimmable     | Yes                                                                          |                  |     |
| Driver       | Remote                                                                       |                  |     |
| Driver type  | Electronic,<br>Electronic<br>dimnable 1-<br>10V, Electronic<br>dimnable DALI |                  |     |
| Emergency    | Without                                                                      |                  |     |

### Physical

|                     |       |
|---------------------|-------|
| Color               | Black |
| Orientation         | Fixed |
| Recessed depth (mm) | 91    |
| Weight (kg)         | 0.22  |
| Spot diameter (mm)  | 60    |

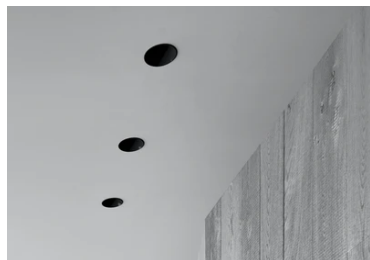

Light Shadow Pro Ø60 Fixed Optic Wide Flood



Installation Frame Trim  
08.0160.40



Installation Frame Trim  
08.0160.14



Installation Frame No Trim  
08.0162.00



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200mA – 8,5W / 250mA – 11W / 300mA – 13W / 350mA – 15W / 400mA – 17,5W / 450mA 19,5W / 500mA – 22W.  
60.9160



Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 36W – 700 mA  
60.9439



Continuous current supply source of 240V – 50/60Hz with dimmable DALI 2  
60.9186



Continuous current power supply of 12-24V 220/240V – 50/60Hz  
60.9160



Continuous current power supply of 12-24V 220/240V – 50/60Hz  
60.9439



Continuous current power supply of 12-24V 220/240V – 50/60Hz  
60.9186

switch  
60.9162



adjustable switch. 1-10V or push  
dimming.  
60.9188



adjustable. Regulable DALI 1 y DALI 2  
60.9222

---

Continuous current power supply,  
Mains dimming 220/240V – 50/60Hz, 12-  
20W  
60.9467

---

Continuous current power supply,  
dimmable Casambi, 220/240V –  
50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207