



## Light Shadow Pro Ø90 Adjustable Optic Super Spot

■ 03.9980.14 - Black


LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

### Main specifications

|                 |       |                |          |
|-----------------|-------|----------------|----------|
| Number of heads | 1     | Net lumen (lm) | 763      |
| Lamp category   | LED   | Mountings      | Recessed |
| Power (W)       | 10W   | Environment    | Indoor   |
| CCT (K)         | 2700K |                |          |
| CRI             | 90    |                |          |

### Optical

|                        |            |
|------------------------|------------|
| Lighting type          | Direct     |
| LED type               | LED array  |
| Light distribution     | Symmetric  |
| Optical type           | Super spot |
| Beam angle (°)         | 9          |
| Beam angle C90-270 (°) | 9          |



Beam Angle: 9°

|  | h(m) | E(lx) | D(m) |
|--|------|-------|------|
|--|------|-------|------|

|   |       |      |
|---|-------|------|
| 1 | 26293 | 0.16 |
|---|-------|------|


|   |      |      |
|---|------|------|
| 2 | 6573 | 0.31 |
|---|------|------|

|   |      |      |
|---|------|------|
| 3 | 2921 | 0.47 |
|---|------|------|

|   |      |      |
|---|------|------|
| 4 | 1643 | 0.62 |
|---|------|------|

|   |      |      |
|---|------|------|
| 5 | 1052 | 0.78 |
|---|------|------|

Luminous flux luminaire  
763 lm




### Electrical

|              |                                                                              |                  |     |
|--------------|------------------------------------------------------------------------------|------------------|-----|
| Current (mA) | 750                                                                          | Insulation class | III |
| Dimmable     | Yes                                                                          |                  |     |
| Driver       | Remote                                                                       |                  |     |
| Driver type  | Electronic,<br>Electronic<br>dimmable 1-<br>10V, Electronic<br>dimmable DALI |                  |     |
| Emergency    | Without                                                                      |                  |     |

### Physical

|                     |            |                    |     |
|---------------------|------------|--------------------|-----|
| Color               | Black      | Rotation (°)       | 355 |
| Orientation         | Adjustable | Spot diameter (mm) | 90  |
| Recessed depth (mm) | 111        |                    |     |
| Weight (kg)         | 0.54       |                    |     |
| Tilt (°)            | 35         |                    |     |




Light Shadow Pro Ø90 Adjustable Optic Super Spot



Installation Frame Trim  
08.0165.40



Installation Frame Trim  
08.0165.14

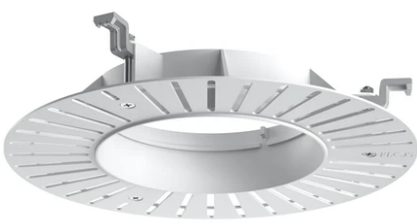

Installation Frame No Trim  
08.0167.00



Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 36W – 700 mA  
60.9439



Continuous current supply source of 240V – 50/60Hz with dimmable DALI 2  
60.9186



Continuous current power supply of 13-42W, 220/240V – 50/60Hz with power current selected through adjustable switch  
60.9162



Continuous current power supply of 13-20W, 110\*/240V – 50/60Hz with power current selected through adjustable switch. 1-10V or push  
60.9467



Continuous current power supply, Mains dimming 220/240V – 50/60Hz, 12-20W  
60.9467



Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207

