


## Light Shadow Pro Ø90 Adjustable Optic Super Spot

■ 03.9980.GL - Gold

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.




### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	672
<b>Lamp category</b>	LED	<b>Mountings</b>	Recessed
<b>Power (W)</b>	10W	<b>Environment</b>	Indoor
<b>CCT (K)</b>	2700K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	LED array
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Super spot
<b>Beam angle (°)</b>	11
<b>Beam angle C90-270 (°)</b>	11

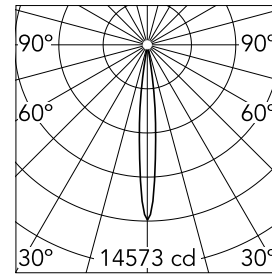

<b>Beam Angle:</b>	11°		
<b>h(m)</b>	<b>E(lx)</b>	<b>D(m)</b>	
1	14573	0.19	
2	3643	0.38	
3	1619	0.57	
4	911	0.76	
5	583	0.94	

Luminous flux luminaire  
672 lm

### Electrical

<b>Current (mA)</b>	750	<b>Insulation class</b>	III
<b>Dimmable</b>	Yes		
<b>Driver</b>	Remote		
<b>Driver type</b>	Electronic, Electronic dimmable 1- 10V, Electronic dimmable DALI		
<b>Emergency</b>	Without		


### Physical

<b>Color</b>	Gold	<b>Spot diameter (mm)</b>	90
<b>Orientation</b>	Adjustable		
<b>Recessed depth (mm)</b>	111		
<b>Weight (kg)</b>	0.54		
<b>Tilt (°)</b>	30		


### Note

Preliminary photometries.

### Certification / Marking



## Light Shadow Pro Ø90 Adjustable Optic Super Spot

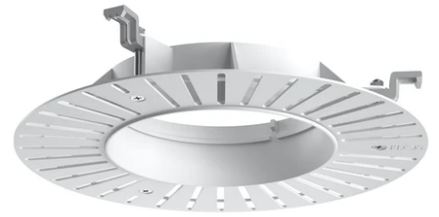

---

Installation Frame Trim  
08.0165.40

---

Installation Frame Trim  
08.0165.14

---

Installation Frame No Trim  
08.0167.00