



Light Shadow Pro Ø90 Adjustable Optic Super Spot

03.9985.06 - Chrome


LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Main specifications

Number of heads	1	Net lumen (lm)	807
Lamp category	LED	Mountings	Recessed
Power (W)	10W	Environment	Indoor
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Super spot
Beam angle (°)	9
Beam angle C90-270 (°)	9



Beam Angle: 9°

h(m)	E(lx)	D(m)
------	-------	------

1	27622	0.16
---	-------	------

2	6905	0.31
---	------	------

3	3069	0.47
---	------	------

4	1726	0.62
---	------	------

5	1105	0.78
---	------	------




Luminous flux luminaire
807 lm

Electrical

Current (mA)	750	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable 1- 10V, Electronic dimmable DALI		
Emergency	Without		

Physical

Color	Chrome	Rotation (°)	355
Orientation	Adjustable	Spot diameter (mm)	90
Recessed depth (mm)	111		
Weight (kg)	0.54		
Tilt (°)	35		

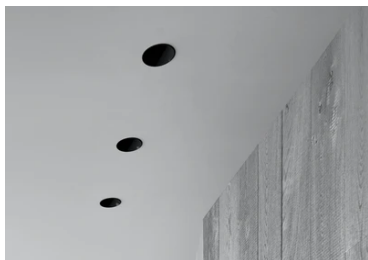


Light Shadow Pro Ø90 Adjustable Optic Super Spot



Installation Frame Trim
08.0165.40



Installation Frame Trim
08.0165.14

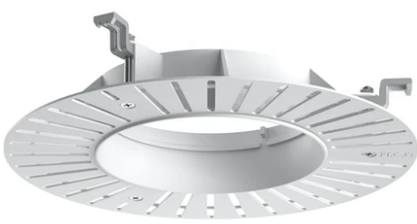

Installation Frame No Trim
08.0167.00



Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 36W – 700 mA
60.9439



Continuous current supply source of 240V – 50/60Hz with dimmable DALI 2
60.9186



Continuous current power supply of 13-42W, 220/240V – 50/60Hz with power current selected through adjustable switch
60.9162



Continuous current power supply of 13-20W, 110*/240V – 50/60Hz with power current selected through adjustable switch. 1-10V or push
60.9467



Continuous current power supply, Mains dimming 220/240V – 50/60Hz, 12-20W
60.9467



Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 35W – 650mA / 36W – 700 mA.
60.9207

