



Light Shadow Pro Ø90 Fixed Optic Spot

03.9920.GL - Gold


LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Main specifications

Number of heads	1	Net lumen (lm)	2117
Lamp category	LED	Mountings	Recessed
Power (W)	22W	Environment	Indoor
CCT (K)	4000K		
CRI	90		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	13
Beam angle C90-270 (°)	13



Beam Angle: 13°

	h(m)	E(lx)	D(m)
--	------	-------	------

1	34103	0.23
---	-------	------

2	8526	0.45
---	------	------

3	3789	0.68
---	------	------

4	2131	0.91
---	------	------

5	1364	1.13
---	------	------

Luminous flux luminaire
2117 lm

Electrical




Current (mA)	600	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimnable 1- 10V, Electronic dimnable DALI		
Emergency	Without		

Physical

Color	Gold
Orientation	Fixed
Recessed depth (mm)	129
Spot diameter (mm)	90

Note

Preliminary photometries.

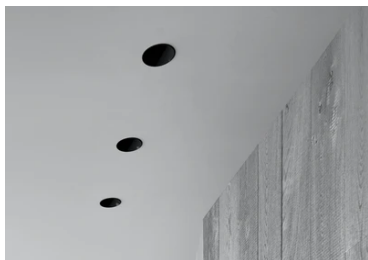

Light Shadow Pro Ø90 Fixed Optic Spot



Installation Frame Trim
08.0161.40



Installation Frame Trim
08.0161.14



Installation Frame No Trim
08.0163.00



Power supply non dimmable. 24W
Non dimmable continuous current power supply of 24W, 110/277V – 50/60Hz, with power current selected through adjustable 600 mA switch
60.9523



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200mA – 8,5W / 250mA – 11W / 300mA – 13W / 350mA – 15W / 400mA – 17,5W / 450mA 19,5W / 500mA – 22W.
60.9160



Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 36W – 700 mA
60.9439



Continuous current supply source of 24W
Non dimmable continuous current power supply of 24W, 110/277V – 50/60Hz, with power current selected through adjustable 600 mA switch
60.9523



Continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200mA – 8,5W / 250mA – 11W / 300mA – 13W / 350mA – 15W / 400mA – 17,5W / 450mA 19,5W / 500mA – 22W.
60.9160



Continuous current power supply of 220/240V – 50/60Hz, 36W – 700 mA
0/1-10V dimmable, 220/240V – 50/60Hz, 36W – 700 mA
60.9439

switch
60.9162



adjustable switch. 1-10V or push
dimming.
60.9188



Continuous current power supply of
12-20W, 110*/240V – 50/60Hz with
power current selected through
adjustable. Regulable DALI 1 y DALI 2
60.9222

Continuous current power supply,
Mains dimming 220/240V – 50/60Hz, 12-
20W
60.9467

Continuous current power supply,
dimmable Casambi, 220/240V –
50/60Hz, 35W – 650mA / 36W – 700 mA.
60.9207