

## Light Shadow Wall-Washer Casambi integrated

New

### 03.9904.14ACB - Black

LED lighting module, with 4 spotlights and low glare, to be installed in the The Running Magnet system. DC/DC, built-in electronic current converter.




### Main specifications

Lamp category	LED	Net lumen (lm)	730
Power (W)	10.8W	Mountings	Track
System power (W)	13.4	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		


### Optical

Lighting type	Indirect, Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wall Washer
	Down
Beam angle (°)	23
Beam angle C90-270 (°)	46
Efficiency (lm/W)	54.48



Beam Angle:	22°		
	h(m)	E(lx)	D(m)
1	1257	0.50	
2	314	0.99	
3	140	1.49	
4	79	1.99	
5	50	2.48	

Luminous flux luminaire  
696 lm (EXTREME CUT OFF)

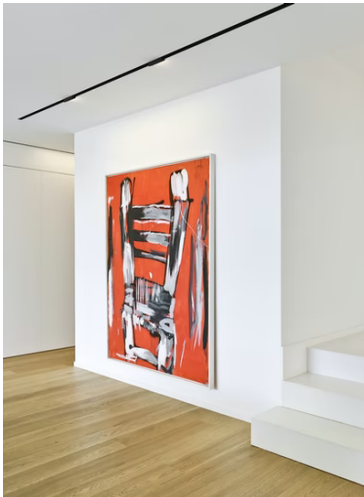

### Electrical

Voltage (V)	24.00	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Dimmable		
Emergency	Casambi		
	Without		

### Physical

Color	Black
Orientation	Fixed
Weight (kg)	0.34
Length (mm)	140
Lifespan (L70 B10)	L80B50

### Note

The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.

