


Light Sniper Adjustable Square 1-10V

■ 03.4687.GLA1V - Gold

High-performance recessed luminaire with LED light source. Remote 220-240V power supply included.

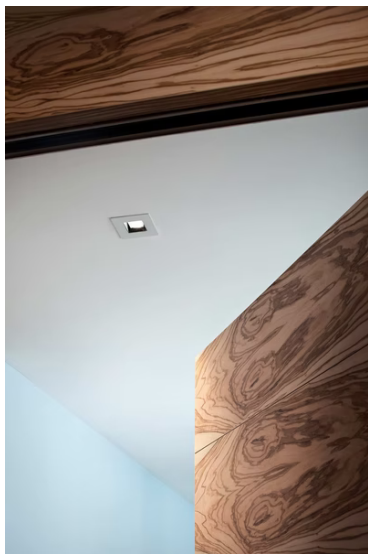


Main specifications

Number of heads	1	Net lumen (lm)	153
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	9W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	98		

Optical

Lighting type	Direct
LED type	Phosphor LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	24
Beam angle C90-270 (°)	25



Beam Angle: 24°

h(m)	E(lx)	D(m)
1	773	0.42
2	193	0.85
3	86	1.27
4	48	1.69
5	31	2.11



Luminous flux luminaire
153 lm (EXTREME CUT OFF)

Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable 1-10V		

Physical

Color	Gold
Orientation	Adjustable
Recessed depth (mm)	125
Weight (kg)	0.51
Rotation (°)	360



Light Sniper Adjustable Square 1-10V




Ceiling protector accessory. Square
08.8222.30A



Ceiling protector accessory. 10 Units
08.8243.00.1U



Concrete instalation can.
08.8250.00



Flush ceilling square frame accessory
08.8240.00B



Ceiling protector accessory.
08.8243.00



Ceiling protector accessory. 50 Units
08.8243.00.5U