


Light Sniper Fixed Square Dali

■ 03.4633.06ADA - Chrome

High-performance recessed luminaire with LED light source. Remote 220-240V power supply included.

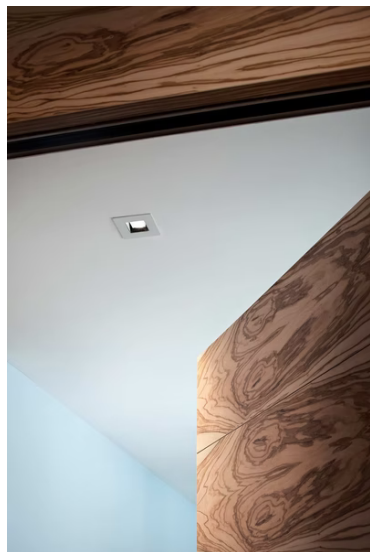


Main specifications

Number of heads	1	Net lumen (lm)	167
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	9W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	98		

Optical

Lighting type	Direct
LED type	Phosphor LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	24
Beam angle C90-270 (°)	26



Beam Angle: 24°

h(m)	E(lx)	D(m)
1	773	0.43
2	193	0.87
3	86	1.30
4	48	1.73
5	31	2.17



Luminous flux luminaire
167 lm (EXTREME CUT OFF)

Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI		
	1		

Physical


Color	Chrome
Orientation	Fixed
Recessed depth (mm)	115
Weight (kg)	0.51



Light Sniper Fixed Square Dali



Concrete instalation can.
08.8250.00



Flush ceilling square frame accessory
08.8240.00B



Ceiling protector accessory.
08.8243.00



Ceiling protector accessory. 50 Units
08.8243.00.5U



Ceiling protector accessory. Square
08.8222.30A



Ceiling protector accessory. 10 Units
08.8243.00.1U