


## Light Sniper Wall-Washer Square

■ 03.4990.06A - Chrome

High-performance recessed luminaire with LED light source. Remote 220-240V power supply included.

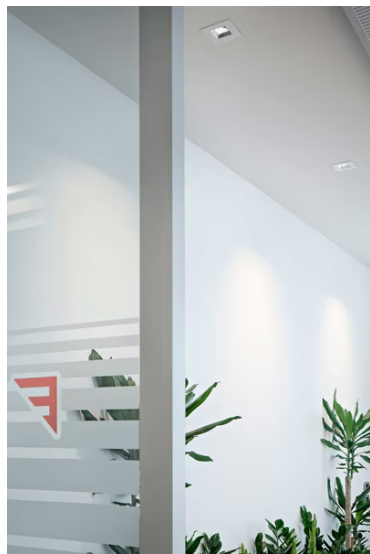


### Main specifications

Number of heads	1	Net lumen (lm)	339
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	11W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

### Optical

Lighting type	Indirect, Direct
LED type	Power LED
Light distribution	Asymmetric
Optical type	Wall Washer
Beam angle (°)	34
Beam angle C90-270 (°)	36

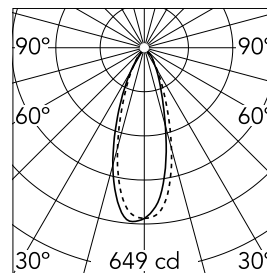

Beam Angle: 34°

h(m)	E(lx)	D(m)
1	649	0.61
2	162	1.23
3	72	1.84
4	41	2.46
5	26	3.07


Luminous flux luminaire  
339 lm (EXTREME CUT OFF)

### Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	No		
Driver	Remote included		
Driver type	Non Dimmable		

### Physical

Color	Chrome
Orientation	Fixed
Recessed depth (mm)	145
Weight (kg)	0.49



Light Sniper Wall-Washer Square



Ceiling protector accessory. 50 Units  
08.8243.00.5U



Elliptical light distribution lens  
08.8041.68




Ceiling protector accessory. 10 Units  
08.8243.00.1U



Concrete instalation can.  
08.8250.00



Ceiling protector accessory.  
08.8243.00

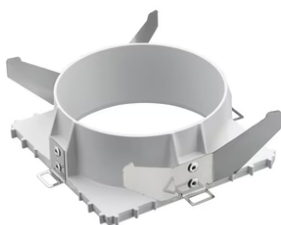

Flush ceiling square frame accessory  
08.8240.00B



Honeycomb  
08.8412.14



Ceiling protector accessory. Square  
08.8222.30A