



Light Stripe Diffused

New

03.2265.14 - Black

Diffused LED light module to be installed in The Micro Running Magnet System.

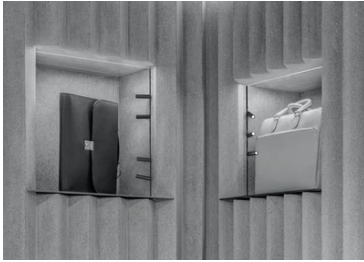


Main specifications

| | | | |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 460 |
| Lamp category | LED | Mountings | Track |
| Power (W) | 9W | Environment | Indoor dry location |
| CCT (K) | 3000K | | |
| CRI | 90 | | |

Optical

| | |
|------------------------|----------------|
| Lighting type | Direct |
| LED type | Top LED |
| Light distribution | Symmetric |
| Optical type | Diffused light |
| Beam angle (°) | 114 |
| Beam angle C90-270 (°) | 135 |



Beam Angle: 114°

| h(m) | E(lx) | D(m) |
|------|-------|-------|
| 1 | 128 | 3.11 |
| 2 | 32 | 6.21 |
| 3 | 14 | 9.32 |
| 4 | 8 | 12.43 |
| 5 | 5 | 15.53 |

Luminous flux luminaire
460 lm

Electrical

| | |
|------------------|---|
| Dimmable | Yes |
| Driver | Remote excluded |
| Driver type | Non Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1 |
| Emergency | Without |
| Insulation class | III |

Physical

| | |
|-------------|-------|
| Color | Black |
| Orientation | Fixed |
| Weight (kg) | 0,09 |
| Length (mm) | 600 |

