



## Light Stripe Diffused

New

■ 03.2269.14 - Black

Diffused LED light module to be installed in The Micro Running Magnet System.

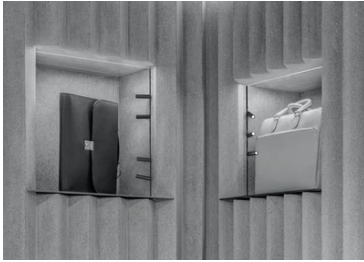


### Main specifications

Number of heads	1	Net lumen (lm)	689
Lamp category	LED	Mountings	Track
Power (W)	13.5W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	114
Beam angle C90-270 (°)	135



Beam Angle: 114°

h(m)	E(lx)	D(m)
1	192	3.11
2	48	6.21
3	21	9.32
4	12	12.43
5	8	15.53

Luminous flux luminaire  
689 lm

### Electrical

Dimmable	Yes
Driver	Remote excluded
Driver type	Non Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1
Emergency	Without
Insulation class	III

### Physical

Color	Black
Orientation	Fixed
Weight (kg)	0,09
Length (mm)	900

