



## Light Tube Ø 30 Direct 1500 mm Casambi integrated

New

### 03.8102.14.CB - Black

Diffused LED light module to be installed in The Infra-Structure.

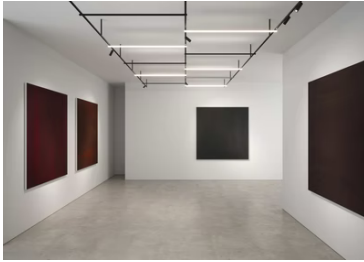


### Main specifications

<b>Number of heads</b>	1	<b>CRI</b>	90
<b>Lamp category</b>	LED	<b>Net lumen (lm)</b>	2329
<b>Power (W)</b>	38W	<b>Mountings</b>	Track
<b>System power (W)</b>	38	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	2700K		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	Top LED
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Diffused light
<b>Beam angle (°)</b>	106
<b>Beam angle C90-270 (°)</b>	106
<b>Efficiency (lm/W)</b>	61.29



Beam Angle: 150°

h(m) E(lx) D(m)

1	571	7.49
2	143	14.98
3	63	22.47
4	36	29.96
5	23	37.45

Luminous flux luminaire  
2329 lm

### Electrical

<b>Voltage (V)</b>	48	<b>Insulation class</b>	III
<b>Dimmable</b>	Yes		
<b>Driver</b>	Remote excluded		
<b>Driver type</b>	Dimmable		
	Casambi		
<b>Emergency</b>	Without		

### Physical

<b>Color</b>	Black
<b>Orientation</b>	Fixed
<b>Weight (kg)</b>	1.21
<b>Length (mm)</b>	1544
<b>Lifespan (L70 B10)</b>	L80B50

### Note

System turning fastening elements 0°-90° with a magnetic connection and mechanic security lock for a transversally installation between two lines of the profile. The Light Tube are only fed by one end of the ends and do not communicate current through the other end. The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.

