

## Micro Spot

■ 03.2213.14 - Black

Accent lighting LED module to be installed in The Running Magnet System. Built-in DC/DC electronic voltage converter.




### Main specifications

|                 |       |                |        |
|-----------------|-------|----------------|--------|
| Number of heads | 1     | Net lumen (lm) | 82     |
| Lamp category   | LED   | Mountings      | Track  |
| Power (W)       | 1.5W  | Environment    | Indoor |
| CCT (K)         | 5000K |                |        |
| CRI             | 90    |                |        |

### Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | Power LED |
| Light distribution     | Symmetric |
| Optical type           | Medium    |
| Beam angle (°)         | 23        |
| Beam angle C90-270 (°) | 23        |



Beam Angle: 23°

| h(m) | E(lx) | D(m) |
|------|-------|------|
|------|-------|------|

|   |     |      |
|---|-----|------|
| 1 | 324 | 0.41 |
|---|-----|------|

|   |    |      |
|---|----|------|
| 2 | 81 | 0.83 |
|---|----|------|

|   |    |      |
|---|----|------|
| 3 | 36 | 1.24 |
|---|----|------|

|   |    |      |
|---|----|------|
| 4 | 20 | 1.65 |
|---|----|------|

|   |    |      |
|---|----|------|
| 5 | 13 | 2.06 |
|---|----|------|



Luminous flux luminaire  
82 lm

### Electrical

|                  |                                                                                                                    |
|------------------|--------------------------------------------------------------------------------------------------------------------|
| Dimmable         | Yes                                                                                                                |
| Driver           | remote excluded                                                                                                    |
| Driver type      | Electronic,<br>Electronic<br>dimmable<br>CASAMBI,<br>Electronic<br>dimmable 1-<br>10V, Electronic<br>dimmable DALI |
| Emergency        | Without                                                                                                            |
| Insulation class | III                                                                                                                |

### Physical

|              |            |                    |    |
|--------------|------------|--------------------|----|
| Color        | Black      | Spot diameter (mm) | 13 |
| Orientation  | Adjustable | Length (mm)        | 41 |
| Weight (kg)  | 0.02       |                    |    |
| Tilt (°)     | 90         |                    |    |
| Rotation (°) | 267        |                    |    |

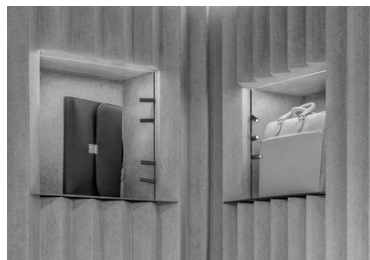

### Certification / Marking

