



Mini Box

■ 07.9005.04 - Matt Black


Recessed signalling lamp for indoor or outdoor use. Main voltage light source.

Main specifications

Number of heads	1	Environment	Indoor dry location, Outdoor wet location
Lamp category	LED retrofit		
CCT (K)	2900K		
Net lumen (lm)	36		
Mountings	Wall recessed		


Optical

Lighting type	Indirect, Direct
Lamp type	QT-14
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	46
Beam angle C90-270 (°)	72



Luminous flux lumineire
250 lm

Beam Angle: 72°		
h(m)	E(lx)	D(m)
1	11	3.05
2	3	6.11
3	1	9.16
4	1	12.22
5	0	15.27




Electrical

Frequency (Hz)	50/60
Lamp holder	G9
Emergency	Without
Insulation class	I

Physical

Color	Matt Black
Orientation	Fixed
Recessed depth (mm)	85
Weight (kg)	0.30




Mini Box



Flush wall Installation
08.8246.00



Junction box
08.8012.00

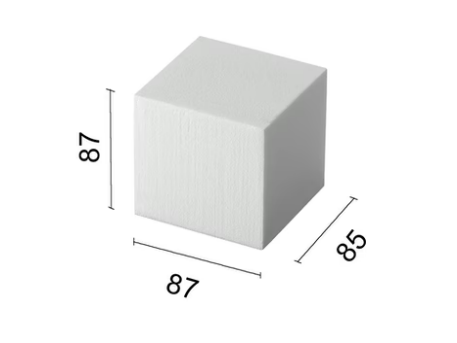

High density polystyrene
(87x85x87mm)
80.1332