



## Nano Spot

New

03.2215.40A - White

Accent lighting LED module to be installed in The Running Magnet System. Built-in DC/DC electronic voltage converter.

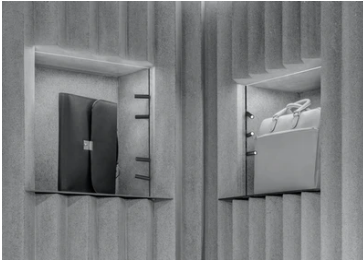


### Main specifications

Number of heads	1	Net lumen (lm)	77
Lamp category	LED	Mountings	Track
Power (W)	2W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	32
Beam angle C90-270 (°)	32



Beam Angle:	32°		
	h(m)	E(lx)	D(m)
1	238	0.57	
2	60	1.15	
3	26	1.72	
4	15	2.29	
5	10	2.87	

Luminous flux luminaire  
77 lm

### Electrical

Dimmable	Yes
Driver	Remote excluded
Driver type	Electronic 12V, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1
Emergency	Without
Insulation class	III

### Physical

Color	White	Spot diameter (mm)	13
Orientation	Adjustable	Length (mm)	41
Weight (kg)	0.02		
Tilt (°)	90		
Rotation (°)	267		

