

Round Light Small

SA.3010.1C - Raw

Recessed sign luminaire for indoor application. 100/240V power supply source included.




Main specifications

Lamp category	LED	Mountings	Recessed
Power (W)	1W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		
Net lumen (lm)	17		

Optical




Lighting type	Indirect
Light distribution	Asymmetric
Optical type	Diffused light
Beam angle (°)	41
Beam angle C90-270 (°)	53

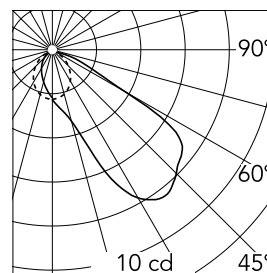

Beam Angle: 53°

h(m)	E(lx)	D(m)
1	10	1.44
2	3	2.88
3	1	4.33
4	1	5.77
5	0	7.21

Luminous flux luminaire
17 lm

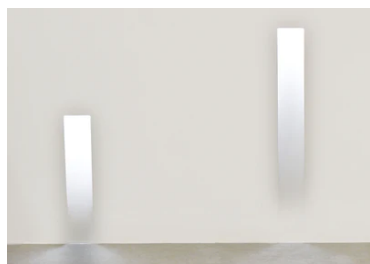

Electrical

Dimmable	No
Driver	Integrated
Driver type	Non Dimmable
Emergency	Without
Insulation class	II

Physical

Color	Raw
Orientation	Fixed
Weight (kg)	2.5

